
User Manual for the

SunScan

Canopy Analysis System

type SS1



AT

SS1-UM-3.4

Delta-T Devices Ltd

Notices

Copyright

All rights reserved. Under the copyright laws, this manual may not be copied, in whole or in part, without the written consent of Delta-T Devices Ltd. Under the law, copying includes translation into another language.

Copyright © 2024 Delta-T Devices Limited

SunData software and canopy theory are copyright © 1996 John Wood, Peak Design Ltd, Wensley Road, Winster, Derbyshire, U.K.

Trademarks

Windows and Excel are registered trademarks of the Microsoft Corporation.

All other trademarks are acknowledged. Some names referred to are registered trademarks.

CE Conformity

The SunScan system conforms to EU regulations regarding electromagnetic emissions and susceptibility and is CE marked by Delta-T Devices Ltd.

For certificates, contact Delta-T at sales@delta-t.co.uk.

Warnings

To maintain conformance to CE standards, the equipment must be used as described in this manual. Modifications to the equipment may invalidate CE certifications.

Delta-T Devices Ltd reserves the right to change the designs and specifications of its products at any time without prior notice. The information in this document is subject to change without notice.

Authors

Nick Webb, Chris Nicholl, John Wood, Ed Potter.

User Manual Version: 3.4 Dec 2024



Delta-T Devices Ltd
130 Low Road, Burwell
Cambridge CB25 0EJ
UK

Tel: +44 (0)1638 742922
Fax: +44 (0)1638 743155
email: sales@delta-t.co.uk
web: www.delta-t.co.uk

Contents

Notices	2
Contents	3
Introduction	6
About this manual	6
Overview	6
Uses	6
Achievable Range	7
Parts and Accessories	8
Summary	8
Description	8
System Connection Options	13
Radio Link connections	14
Testing the Range	15
Trees and Tall Canopies (PAR only)	15
Quick Start	17
Button Actions	17
Alternative ways of controlling SunScan.	17
Change SunData Settings	18
Take LAI Readings	19
Use the Emulator	21
Review Data	22
Reviewing Display Type: All data	22
Connecting the PDA to your PC	23
Configuration and data file handling	24
Configuration files	24
Data Files	26
Displaying data files on your PC	27
Menus and Screens	28
Settings menu options	28
Calibrate menu option	30
Review Data menu option	30
About menu option	30
What to Measure and How	31
Experiment Design	31
Above-canopy reference requirements	31

Direct and Diffuse components	33
Canopy type and BF5 practicalities	33
Canopy type and LAI estimates	34
Canopy sampling volume	34
Preferred light and weather conditions	35
Advice on Absorption and ELADP values	35
SunScan Measurement modes	39
LAI theory	47
Ingredients of the LAI computation method	47
Theory versus reality	48
Derivation of Wood's SunScan canopy analysis equations	49
The major assumptions	49
Beer's law for canopy absorption	49
Campbell's Ellipsoidal LAD equations.	49
Transmission of Diffuse Light	50
Modelling the canopy transmission	52
Accuracy of LAI calculations	54
Functions used to model canopy transmission	55
Diffuse light - cosine response sensor	55
Diffuse light - hemispherical response sensor.	55
Modelling incomplete PAR absorption and scattering	57
Calculating zenith angles	58
Summary	58
Scientific references	59
Technical Reference	60
Maintenance	60
Batteries	60
Desiccant	62
Checking the PAR calibration	63
Troubleshooting	64
Re-install SunData software	67
Problem Reports	72
Specifications	73
SunScan Probe type SS1	73
Beam Fraction Sensor type BF5	73
PDA	74
Radio Link Performance	74
BF5 Transmitter module BF5-RL4	74
SunScan with Radio Module SS1-RL4	75
Tripod Mounting Plate for BF5 and BF-RL4	75
SunScan to BF5 Cable	75
SunScan to BF5 Extension Cables	75

Telescopic Tripod	76
Carrying Case	76
SunScan Probe Spares Kit type SPS1	76
BF5 Spares Kit type BF5-SP	76
PAR Performance	77
Appendices	79
A. Logging the probe as a Linear Quantum Sensor	79
B. Logging the Beam Fraction sensor	80
Glossary	81
Technical Support	83
Terms and Conditions of sale	83
Service and Spares	84
Technical Support	84
Contact Details	84
Index	85

Introduction


About this manual

This shows how to use the SunScan Canopy Analyser and its accessories. Also included is the use of the Radio Link option.

See also:

- *SunScan Quick Start Guide*.
- *BF5 Sunshine sensor User Manual*

Overview

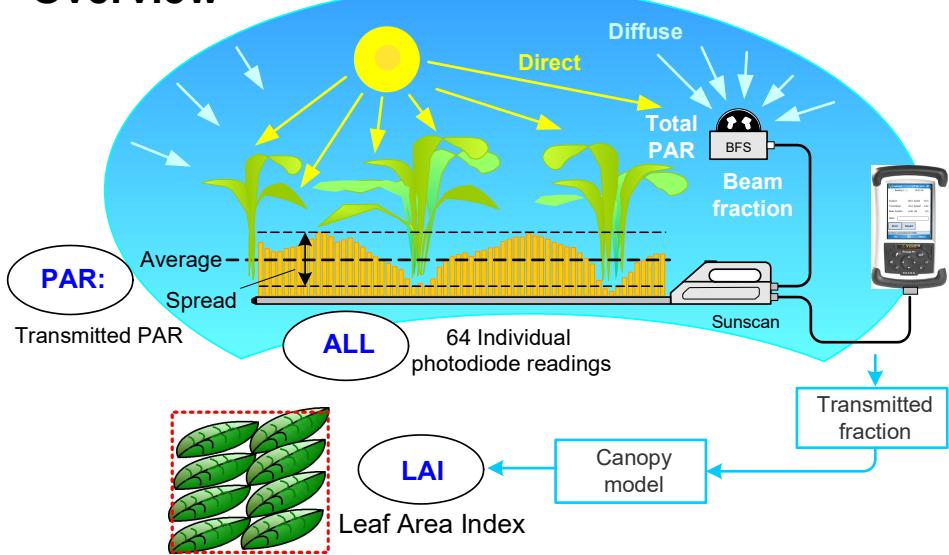

Uses

Leaf Area Index

In some types of canopy, you can estimate leaf area index (LAI) with reasonable accuracy. For best results a BF5 sensor should also be used.

PAR measurements

SunScan can be used as a portable line quantum sensor for measuring levels of photo-synthetically active radiation (PAR) in plant canopies.

Fractional Interception

You can also measure what fraction of the solar radiation is being intercepted by a plant canopy. For best results include a BF5 Sensor.

PAR Mapping

You can rapidly find average levels of PAR beneath the canopy, or make linear transects of the PAR distribution within a canopy.

Linear Quantum Sensor modes

If used with an analogue data logger, SunScan functions as a line quantum sensor with a single analogue output. See Appendix A.

Radio Link

The SunScan radio link is an optional extra available on the SunScan. It is designed to give cable-free operation of the SunScan system in field use. It replaces the cable link between the SunScan probe and the reference Beam Fraction Sensor BF5 by what is sometimes a substantial length of cable (i.e. EXT/8w-xx cables).

The Radio Link can be used in low canopies (field crops, cereals, etc) and in tree canopies (orchards, tree nurseries, etc).

Handling and manipulating the cable within a crop has often been a laborious aspect of SunScan measurements. In addition, the BF5 sensor had to be relocated frequently. The advantages of the radio system are considerable:

- ◆ Cable handling and wear is avoided.
- ◆ Sampling measurements can be taken much faster.
- ◆ Distances over 100m from the BF5 sensor are possible.
- ◆ Fewer BF5 relocations give quicker operation.

Achievable Range



The radio link works on a licence-free frequency in EU countries. The transmitter power is regulated by law, and this limits the clear line of sight range in good conditions to a maximum of about 250m.

The maximum achievable range in real field conditions, working within canopies, will be less than this. It will depend on the nature of the foliage in the canopy, and whether it is wet or not. In addition, there may be local sources of electromagnetic RF interference that could reduce the achievable range.

Disclaimer! In practical use we do not guarantee any minimum range, or that the radio link can be used at all, in a particular situation. The radio link is an option. If it cannot be used, the alternative is to use the type EXT/8w-xx optional extension cables.

Parts and Accessories


Summary

	SS1	SunScan probe no radio
	RPDA	Rugged handheld PDA running SunData
	BF5	Sunshine Sensor
	BF5-RL4	Radio transmitter for BF5 -links to SS1-RL4
	SS1-RL4	SunScan Probe + radio receiver (434 MHz) links to BF-RL4
	SS-TD	Telescopic tripod for BF5
	SS-HB1	Holster Belt for PDA and Sunscan
	SS-PC1	PDA carry case
	SCC1	Carrying case for SunScan
	EXT/8w-10	BF5 to SunScan(SS1) 10m cable
	EXT/8w-xx	BF5 to SS1 extension cable, xx = 5,10 or 25m

Description

SunScan probe

The light sensitive “wand” of the probe is 1 metre long, containing 64 photodiodes equally spaced along its length. The probe handle contains batteries and electronics for converting the photodiode outputs into digital PAR readings, which get sent to your PDA via the RS232 link.

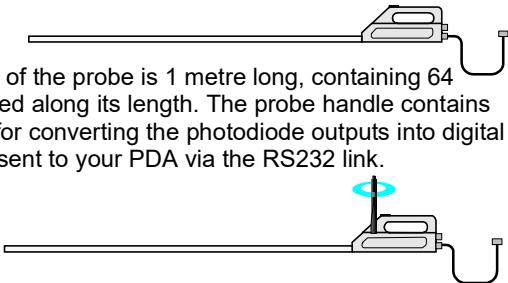

An optional radio link is available for BF5.

Beam Fraction sensor

The Beam Fraction sensor (BFS) also measures PAR light levels. It is used to monitor the light incident on the canopy at the same time as you are making measurements beneath it.



Beam fraction sensors incorporate multiple photodiodes, of which one is always shaded. This patented design allows the direct and diffuse components of PAR to be separated, which is necessary for the computation of LAI.

A radio transmitter is available for connection to SunScan fitted with a radio link.



BF5 and BFS Terminology

We continuously improve the design of our beam fraction sensors. All are interchangeable and compatible with SunScan ¹.

The current model is the BF5.

The newer versions are called Sunshine Sensors - they all measure direct and diffuse radiation, and so all are Beam Fraction Sensors

Note: The SunData software refers to them all as BFS sensors.

PDA

To configure, observe and store readings from the SunScan probe, you need a Personal Digital Assistant (PDA) running Android. The PDA will also need a 9pin serial port on it.



SunData software

The SunData software is pre-installed on your PDA and is ready to control SunScan - to take readings, display and store results, and review data.

It is easy to use, but a familiarity with Android helps.

¹ Apart from the BF1 which is not compatible with the radio link option.

Earlier SunData versions run on a PDA, using Windows Mobile 5, 6 and Windows embedded. Please refer to earlier versions of the user manual for instructions on earlier platforms, or contact Delta-T for assistance.

Three measurement modes are provided and results can be imported into spreadsheets or other applications for analysis on the PDA or a PC.

Transferring readings as data files from the PDA to a PC is a simple drag and drop operation, either using a USB memory stick, Bluetooth or cable connection.

Carrying Case

The sturdy field Carrying Case will protect the SunScan system during transportation and storage. It has room for an optional tripod mount which is intended primarily for use with the BF5, (but can take the SunScan probe). Space is also provided for extension cables that may be ordered with the BF5.



Holster Belt



This optional belt has two holsters - for the PDA and the SunScan probe. The PDA holder has two positions, close to the body for transport, or up and out for "Hands-free" operation of the PDA.

Both holsters can also slide around your body.
Other PDAs may not fit.

Cables

Cable EXT/8w-10 is provided to connect a BF5 to a SunScan. This can be extended with EXT/8w-xx cables, where xx = 5, 10 or 25m.

To connect a BF5 to an analogue data logger use cable SP-BF/w-05 which is 5m long, extension cables can be added to this (up to 100m).

See also the **Summary** diagrams on page 8.


Radio Link

A 434 MHz radio option links the BF5 to a modified SunScan Probe – useful in situations where a cable is inconvenient.

Check with us to see if this radio frequency is approved for use in your country.
Note a type SS1-RL4 radio-enabled SunScan is required.



SunScan Probe SS1-RL4

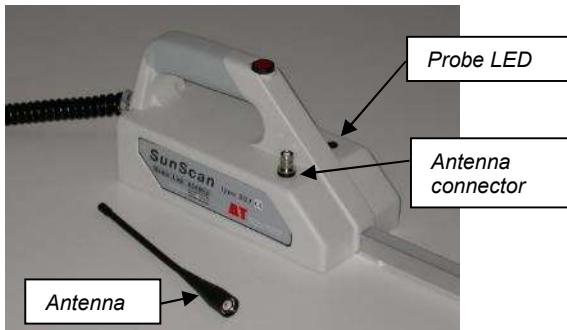


The radio link receiver circuit is built into the probe handle. When the radio system is in use, the probe LED indicates whether or not signals from the BF-RL4 radio transmitter are being picked up.

The radio receiver is powered from the same batteries that power the SunScan probe.

The handle can be dismantled from underneath to access the batteries and to replace a desiccant pack from time to time (see Maintenance section).

Transmitter Module BF5-RL4

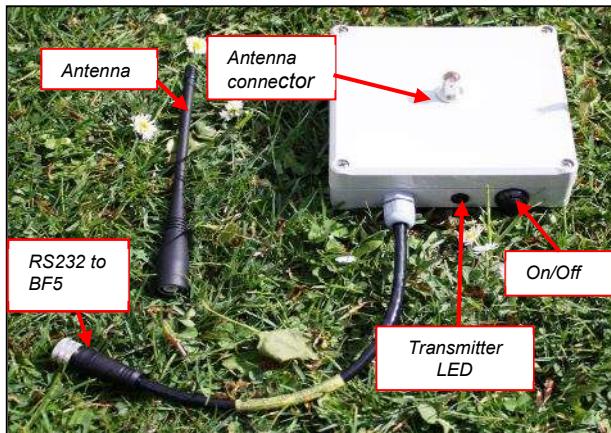

The radio link transmitter module. It also contains batteries.

- ◆ The module case can be dismantled (four corner screws) to access the batteries and to replace a desiccant pack from time to time (see Maintenance section).
- ◆ To switch on, depress the on/off button. The button remains in the depressed position.
- ◆ To switch off, press the button again. The button will return to its outward position.
- ◆ If the module is powered and switched on, the red LED will flash to indicate it is working.

Accessories

Also included with the Radio Link option are two identical antennas (for SunScan probe and BF5 transmitter) and a tripod bracket bar to mount the BF5 transmitter and BF5 on the tripod.



System Connection Options

Possible SunScan System Combinations

Emulator:
No
probe
needed



In Emulator mode the PDA running SunData software can simulate SunScan and BF5 sensor

SunScan



SunScan SSI
+ PDA running
SunData

BF 5

EXT /8w-10

SunScan

SunScan SSI
+ BF5
+ PDA running
SunData

SunScan

BF 5

BF 5-RL 4




Radio version
SunScan
SSI-RL4
+ BF5
+ BF5-RL4
+ PDA running
SunData

Radio Link connections

Transmitter Module and BF5

Fit the BF-RL4 transmitter module on to the mounting plate next to BF5 and mount them both on to the tripod.

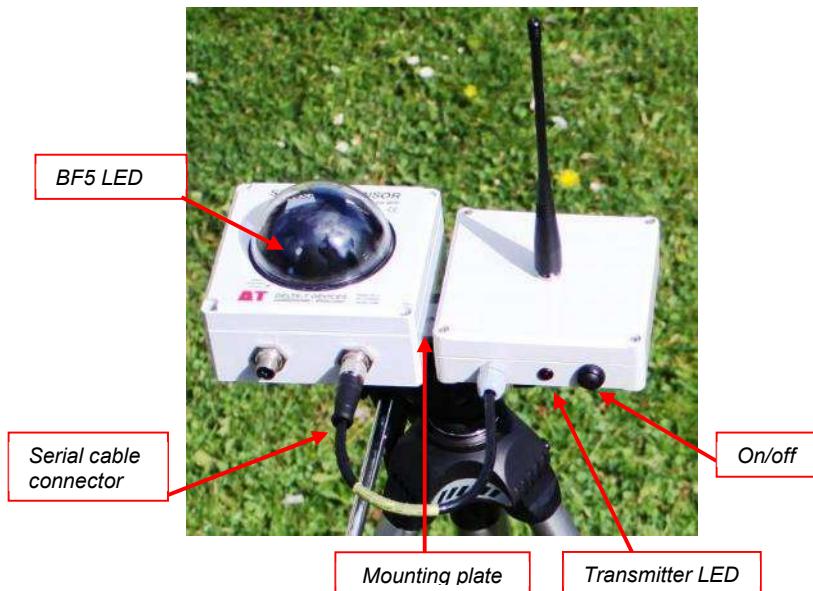

- ◆ Connect the BF5 transmitter cable to the BF5 serial connector. If you were using the system without radio, disconnect the BF5 to SunScan cable from both the BF5 and the SunScan probe.
- ◆ Connect the antenna. Make sure there is no chance of its shadow falling on the BF5 dome when it is positioned in the field.
- ◆ Depress the on/off button on the transmitter to start. You will see the transmitter LED flash every 3 seconds. When the transmitter is on and connected to the BF5, you will see the BF5 LED flash synchronously with the transmitter LED every 3 seconds. A double flash on the transmitter indicates it is receiving RS232 data from the BF5.

SunScan Probe

- ◆ Connect the SunScan probe coiled cable to the PDA.

- ◆ Connect the antenna to the BNC connector on the SunScan handle. Keep the SunScan probe horizontal. The antennas on both the probe and the BF-RL4 module should be approximately vertical.
- ◆ Run the SunData program in the PDA.

The receiver will start listening *after* you take a reading, so the first reading may be bad (showing the incident PAR approximately zero).

You will see the LED on the SunScan light up continuously while it searches for a transmission. Once it has found one, it will give a double flash each time it gets an updated reading (every 3s).

If it loses the signal for any reason (e.g. out of range, or transmitter switched off), you will see a few short single flashes, followed by a long search, and then if there is still no signal, it sleeps. It will continue listening for about 15 minutes after a reading, so you should have good values *after* the very first reading, unless you take a long break.

Testing the Range

Having established correct operation at close quarters, now extend the distance between the BF5 and the probe to check the system remains in contact.

If you have the space, go to about 50m range. Mount the BF5 normally at least 1.5 m above ground level. Hold the SunScan probe horizontally at a similar height. Remember that the antennas on both the probe and the BF5 must be able to "see" each other. Keep your body out of the line of sight. Check that the probe continues to show its double flash.

By experimenting further, with greater distance or with intervening vegetation, you will establish when the system can no longer make contact.

If you lower the probe to ground level, at range, you may start to lose the signal. This is a normal ground effect. Some suggestions on how to work around this effect are given in the Field Techniques section.

The above tests will establish if the radio link is working. If you have problems getting this far, please consult the Troubleshooting section.

Trees and Tall Canopies (PAR only)

A tall canopy is one in which you cannot easily hold the probe above the canopy to take measurements. This will mean you cannot use some of the techniques described above, and you may have to be content with a more restricted range of operation.

The location of the BF5 above the canopy may present problems too. However, for low tree canopies such as orchards and tree nurseries, an extended tripod or a monopod can be effective.

- ◆ Check the levelling of the BF5 in these circumstances. This may not be so easy, but do it as well as you can.
- ◆ Restrict your measurements to the time of day when the sun is near zenith. This will minimise levelling errors of the BF5.

Tall tree canopies, like forests, present different challenges.

- ◆ Mount the BF5 above the canopy on a tower, if you have one.
- ◆ Find a clearing or somewhere else well away from tree shadows and shading.

When taking measurements beneath the trees, you may be distant from the BF5 and you cannot check the incident light above the canopy at your location.

- ◆ Choose weather with slowly changing light levels. Clear blue skies with a high sun or complete overcast conditions are best.

Warning! Whatever canopies you are working in, always remember that for LAI theory to be valid, canopy must be uniform and randomly distributed. In many situations, this will obviously not be the case. However, PAR readings will be valid, and the LAI estimates may have comparative value if used carefully.

Quick Start

Button Actions

Alternative ways of controlling SunScan.



Figure 1 The PDA with SunScan.

SunData actions, such as Read and Store, are activated either by pressing the red SunScan button, or the PDA option.

In this picture these “action” buttons are circled in red.

Tap on different fields or buttons on screen to change the focus.

Note: the arrangement and role of buttons on different PDAs may vary.

Warning: Some PDAs also have buttons along the sides of the PDA. If these are depressed accidentally, for instance when gripped by a cradle, you may find this interferes with the program's focus.

Change SunData Settings

Example: Set up to measure Leaf Area Index

1 **2** **3** **4** **5**

6 Set PDA COM port.
Declare if BFS sensor connected.
Create a new data file.

7 Specify Leaf Area Index Constants.

8 Specify the Site and set the Time.

9 Display type: select LAI, PAR or All (64 individual readings). Title, Group, Sample and Plot names are optional.

You must connect the PDA to a Wi-Fi network first, then adjust the Date & Time settings to match below:
Settings->System->Date & Time->

Set Time automatically - set to: Use network-provided time



Use location to set time zone: on

Note the **Save Settings** and **Load Settings** options in the Settings menu. Use these commands if you intend to pay repeat visits to several different sites, crops or experiments.

See also **Configuration and data file handling** on page 24.

Note PAR and ALL Displays may also be used with a BF5 to give fractional interception.

Take LAI Readings

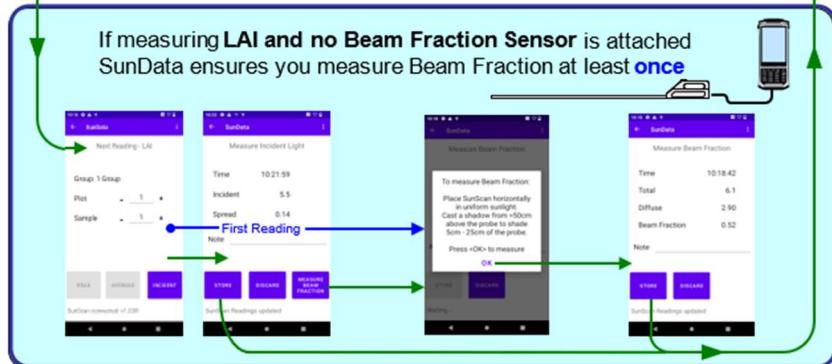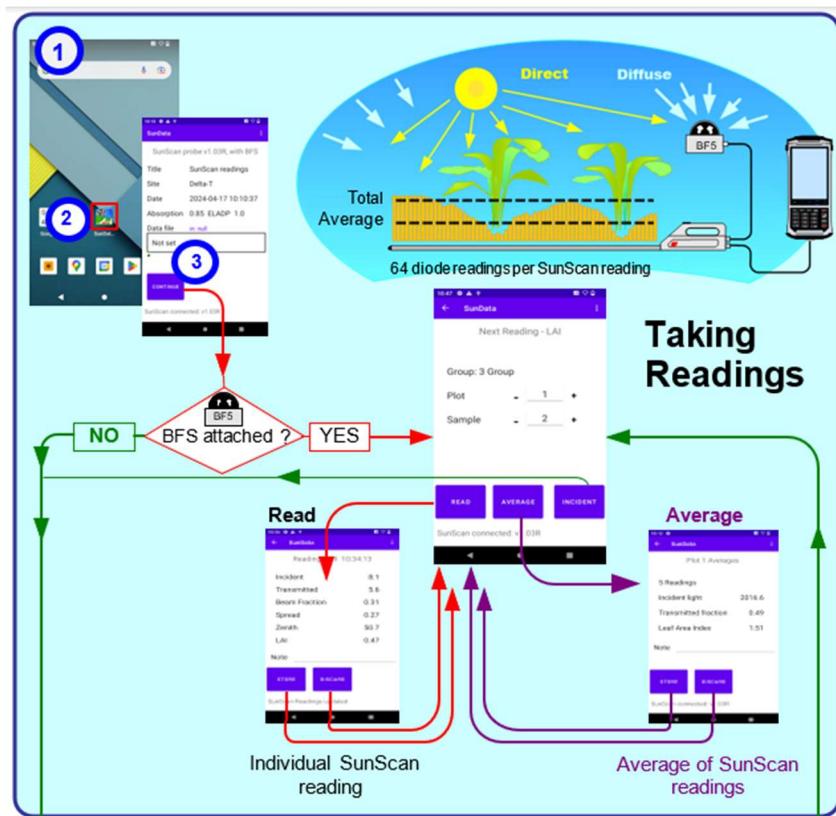


Taking readings for estimating Leaf Area Index is simpler with an external beam fraction sensor (BFS) attached, such as the BF5 Sunshine Sensor. Note 1: If no BFS is attached, SunScan initially takes you through an extra step to measure the **Beam Fraction**. A typical sequence of readings is shown in the diagram below.

Note 2: The SunData software doesn't automatically detect if a BF5 is connected, the user has to set this as stated in the diagram on p14.

See also: **Measuring Leaf Area Without a Beam Fraction Sensor** on page 32.

Diagram illustrating the measurement of Leaf Area Index without a Beam Fraction Sensor

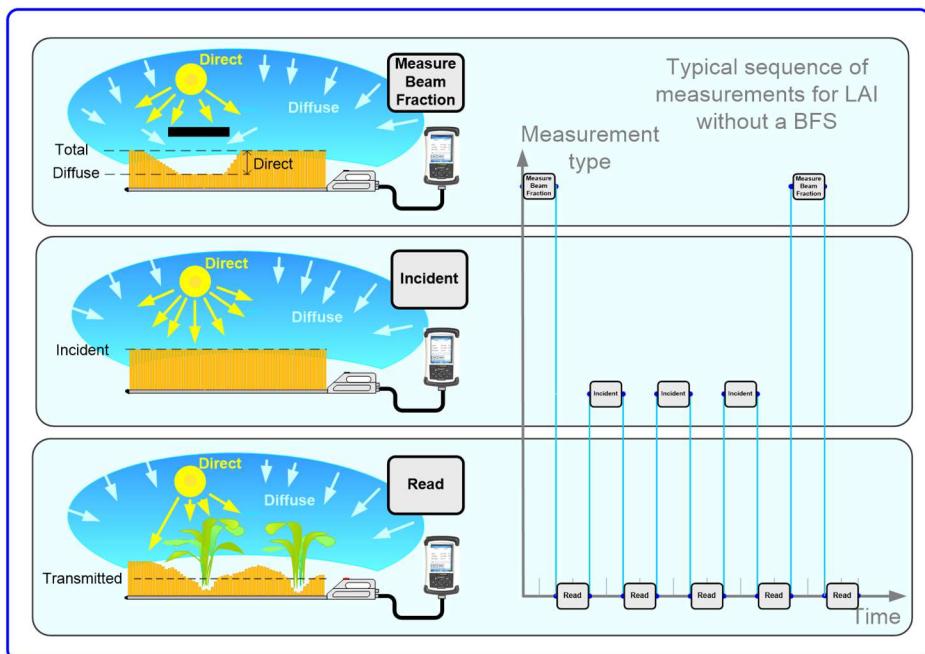

Use the Emulator

For demonstration purposes, the SunData software can be used without the sensors connected. The software can use random values, so users can get used to how the software works without the sensors being used. This is called the **Emulator** mode².

This mode simulates having a SunScan attached (with and without an external beam fraction BFS sensor).

- 1) Turn on PDA *without* SunScan attached.
- 2) Select the **SunData** application icon.
- 3) Click on the vertical 3 dots in the right-hand corner of the screen and select **Settings > Edit Settings**.
- 4) Click on the **SUNSCAN** tab and change the **SunScan** option to **Emulator**.
- 5) Tap on the back arrow.
- 6) Press **Continue** on the touch sensitive screen.
- 7) Press **Read**.
You may add a note if you wish.
- 8) Press **Store**.

Note: The transmitted value is chosen randomly.

Press the button repeatedly, not too quick, to be taken automatically around the **Read** and **Store** cycle.


Use this opportunity to explore all the SunData options.

Later you will learn how to change and save your settings.

For definitions see the Glossary on page 81.

² To re-enable the Emulator mode, see **Change SunData Settings** on page 16.

Review Data

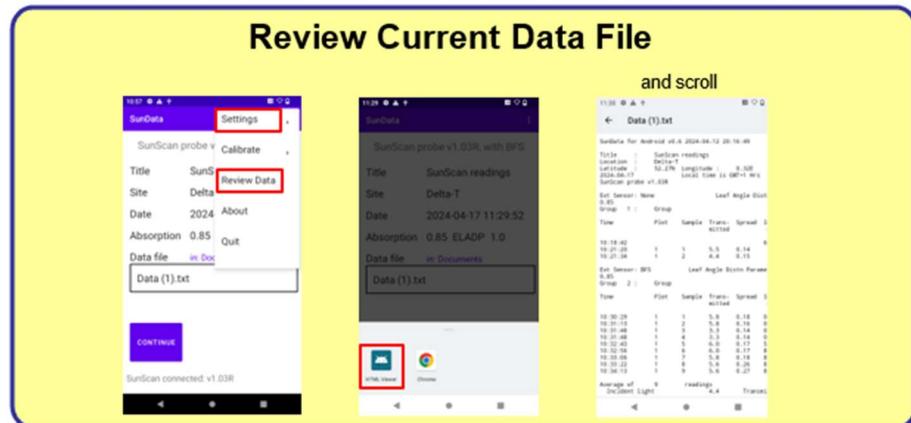

Stored data is saved to a file on the PDA.

To review your readings, tap the 3 vertical dots at the top right-hand corner of the screen and tap on **Review Data** and select the viewing app desired (HTML viewer is the easiest).

Tap on the scroll bars to see all the data.

In the tab-formatted data file, readings do not always line up with their headings.

Reviewing Display Type: All data

Note that if you selected **Display Type: All**, then all 64 individual PAR readings are stored in the data file, and can be seen in **Review Data**, although only the summary values are displayed while taking readings.

For Tab separated data files, these form a single row of values, after the summary values, and they will load into Excel like this.

Connecting the PDA to your PC

Connecting your PDA to a PC lets you transfer your data files and re-install or upgrade the SunData application on your PDA. There are 3 ways you can do this:

1. **Using a cable connection** (similar to connecting your smart phone to a computer).
2. **Using a USB memory stick** to transfer data.
3. **Using Bluetooth.**

Cable connection

Connect the USB-C cable between the PDA and the computer USB port.

On the PDA, pull down the menu screen and select the “**charging this device via USB**” option –“tap for more options”.

Select the “**File transfer**” option.

The PDA will now appear in Windows explorer as an external drive.

You can now copy the data file from the PDA and save it to the PC. Don’t move the data file as the SunData software will still be linked to it.

The data files are usually stored in this location:

Nautiz X81\Internal shared storage\Documents

USB port

Push a USB memory stick into the USB port of the PDA:

If you haven’t used the USB stick with an android device before, you may need to format it:

Insert the USB stick into the PDA, wait a few seconds and drag down from the top to access the notifications.

*There may be a notification stating: “**unsupported general USB drive**”.*

Click on this and select the “portable storage” option.

*Click on the “**Format USB drive**” option.*

Wait for the notification that you can use it.

Then save the datafile to the USB stick. Go into the “Files” app, scroll down to **Storage devices**, and tap on “**Internal storage**”. Tap on “**Documents**”. Locate the datafile that you want, tap on the 3 vertical dots on the right-hand side, select “**copy to**”, select the USB storage symbol option.

Choose the save location on the USB stick.

Remove the USB stick and insert into a PC USB port.

You may get the message (below) from the PC. If so, click on the “continue without scanning” option:



The USB stick will now appear as an external drive in Windows explorer, and you can transfer/copy data files from it to the PC (or vice versa).

Bluetooth

The PDA has Bluetooth functionality so this can be used to transfer files (requires a PC with Bluetooth functionality). On the PDA, switch the Bluetooth on. This can be done by dragging down from the top screen and tapping the Bluetooth button.

Some different versions of PC may handle Bluetooth connections in different ways. As such, we cannot cover the different operations in this manual. Please refer to your PC user instructions for detecting a Bluetooth connection.

Once the Bluetooth connection is established between the PC and the PDA, you can transfer the file as above but, after selecting the file, tap on Share > Bluetooth > tap on the PC Bluetooth connection.

Configuration and data file handling

SunData uses two sorts of files, data files for storing readings, and configuration files, in which you can retain the settings of different sites and experiments.

Configuration files

Configuration files contain all the information in the **Settings** tabs, that is:

- SunScan probe and BF5 sensor settings.
- Site and local time details.
- Leaf constants (Absorption and leaf angle distribution parameters).
- Display mode for readings (LAI, PAR or All).
- Title, Group, Sample and Plot names.
- The Plot and Sample number of the last reading taken.
- The data file name, subdirectory and file type (.TXT).

Use of several configuration files

You can save several different configuration files with different names. This is useful if you need to alternate between different sites with different settings.

Set up the appropriate titles, settings and a unique data file name for each site or experiment, and save them to separate configuration files.

When you revisit the site, use **Settings, Load Settings** to restore its configuration file before you start taking readings there, and use **Settings, Save Settings** again when you finish.

Do this each time you visit a site. This way you will keep a separate data file for each site, and the readings will follow on sequentially within each file, just as if you had been there without interruption.

Creating a configuration file

Use of the **Save Settings** option with a unique file name will create a configuration file.

1. Run **SunData**, select the **Settings, Edit Settings** option and define as many of the settings details as you can establish beforehand, including a data file name and location. See also **Change SunData Settings** on page 18.
2. Tap on the **back arrow**, to return to the main window.
3. Tap **Settings, Save Settings** to save the file. Either select an existing file name (this will overwrite it) or create a new name/file.

Use of the Default.cfg file

Every time you exit SunData, the program state is stored (in a hidden file called **Default.cfg**).

This configuration is restored when the SunData program is next run.

This means you start again exactly where you finished last time.

Data Files

The first time that SunData runs it will display a message to the effect that it cannot find the data file. This is normal and nothing to worry about, simply click on new datafile to set one up. The default name is Data.txt.

A data file is automatically opened whenever you start SunData.

When you take readings, they are *appended* to the data file - readings are added to the end of it, and do not overwrite it.

The data is automatically saved when you switch off. You cannot forget to save, and thereby lose readings. When you switch on again, the same file is open and ready to receive more data. There is no "data file close" command.

Data acquired with different measurement type settings may all be saved to one data file. There is no restriction on this, but your data files will be easier to read if you name a different data file for each Display type.

The same applies if you alternate between different sites, crops or experiments - it can be useful to use a different data file name for each.

Don't forget that the data file name is saved with each configuration file. So, when changing from one experiment, crop, or location to the next you may find it easier to save your current configuration and load a different one – see **Use of several configuration files** on page 25.

Changing the data file

To store data in a different data file you must specify a different file name.

1. Select the 3 vertical dots in the top right-hand corner of the screen and select **Settings > Edit Settings**. In the "SUNSCAN" tab the current data file is displayed ("Data" by default).
2. Either tap **New Data File** to display a **Save As** window (save location and file name can be changed) or tap on "**Choose Data File**" to select a previously saved data file.
3. Tap the **Back Arrow**, to return out of the Settings menu.
4. Go back into the **Settings > Save Settings** menu if you wish to associate this new data file with a new settings configuration.

*Don't forget that the **Settings** configuration file contains the name of the data file it uses. When changing from plot to plot you may simply prefer to restore a different settings configuration.*

Displaying data files on your PC

As soon as you have transferred data files from the PDA to your PC you will want to analyse and print them for your records.

TAB separated .TXT file format

The tab separated text file format is a common format where ASCII characters are separated into fields by tabs. This greatly simplifies importing the files into spreadsheets for further analysis and printout. The example below was created in Microsoft Excel.

Created by SunData for Workabout v1.09									
Title :	Main								
Location :	Winster								
Latitude :	53.1N	Longitude	1.6W						
	31/07/1998			Local time is GMT+0.5 Hrs					
SunScan probe	emulator								
Ext sensor: BFS		Leaf Angle	Distn Parameter:			1	Leaf Absorption:	0.85	
Group 1:	Groupname								
Time	Plot	Sample	Trans- mitted	Spread	Incid- ent	Beam frac	Zenith Angle	LAI	Notes
13:44:37	1	1	1385	0.14	2000	0.65	36.9	0.5	
13:44:42	1	2	1025.1	0.14	2000	0.65	36.9	1	abcdefghijkl
13:45:00	1	3	343.5	0.15	2000	0.65	36.9	2.8	
Average of		3	readings						
Incident light:		2000	Transmitted fraction:		0.46	LAI:		1.5	abcdefghijkl

Regional Settings on PDA and PC

SunData uses the PDA's regional settings to determine the number and date formats it uses in the data files.

The PC should be set to the same regional settings to import the file correctly into Excel.

Menus and Screens

Settings menu options

Edit Settings menu option (Settings >Edit Settings)

SUNSCAN Tab

SunScan


- Emulator:
No external SunScan is needed. The software will generate random values as if a SunScan probe is connected.
- Serial:
Select the serial option if you have connected your SunScan to the 9-pin serial port.

External Sensor

- None:
Select if you have no external Beam Fraction sensor (BFS) connected.
- BFS:
Select BFS if you have an external beam fraction sensor connected to your SunScan.

Data File


- Choose Data File:
Choose an existing data file – new data will be appended to existing data. Existing data will not be lost.
- New Data File:
Create a new data file.

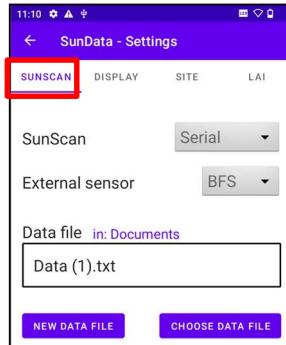

DISPLAY Tab

Display type

- LAI:
Values appropriate to canopy LAI measurements are displayed.
- PAR:
Values appropriate to measurements of PAR levels above and below the canopy are displayed.

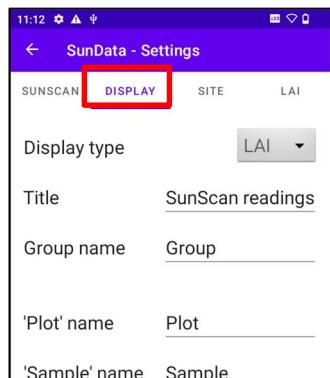

- All:

The display is the same as for PAR, but the 64 individual photodiode readings are also stored in the data file.

Title

- A title for your experiment. This is stored along with site details, at the start of a block of readings.

Group name

- A group is a set of readings which all have the same settings. Groups are numbered automatically in the data file, but you can add a group name as well. A new group is started when the group name, or any other setting, is changed.

Plot name

- Within a group, readings are numbered incrementally by sample number, and plot number (1 – 256). Change these names if you prefer something different. Only the first 6 characters are displayed on screen, and in the Print format data file.

Sample name

- As above

SITE Tab

Site name

- The name of the measurement site.

Latitude 0-90°

- North/South: The latitude of the measurement site, in degrees.

Longitude 0-360°


- East/West: The longitude of the measurement site, in degrees.

Set Time

- Brings up the PDA Clock page. You can set your local time zone, date and time, or another that you are currently visiting. Daylight Saving Time is set automatically by the PDA for your selected time zone.

Local Time

- Shows the current local time zone, and the difference between the local time and UTC (Universal Coordinated Time, or GMT). Use this to check that settings are correct.

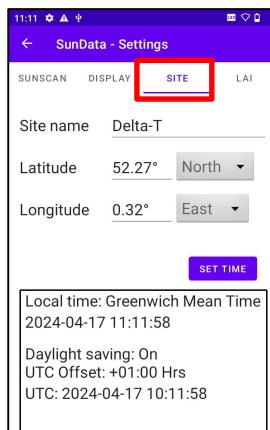

LAI Tab

Leaf Absorption

- 0.5 to 1.0: Set the leaf PAR absorption.

0.85 is typical.

ELADP

- 0 to 1024: Set the Ellipsoidal Leaf Angle Distribution Parameter, which describes the distribution of leaf angles within the canopy. 0 corresponds to entirely vertical leaf elements, 1 to a random spherical distribution, 1024 to entirely horizontal leaf elements. Use 1 as a default.

Load Settings

- Refer to earlier section in user manual “Configuration and data handling”.

Save Settings

- Refer to earlier section in user manual “Configuration and data handling”.

Calibrate menu option

Recalibrate SunScan

- **BFS must be connected by cable**, if used with the RadioLINK connection, the readings will be incorrect or zero. The feature sets the individual sensors along the SunScan wand to match the reading of the connected BFS. See Checking the PAR calibration in the Technical reference section for more information.

Restore Factory Calibration


- Restores the calibration of the SunScan sensors that was determined at Delta-T.

Review Data menu option

- Refer to earlier section in user manual “Review Data”.

About menu option

- Gives version number for SunData, and SunScan firmware version and battery level, if connected.

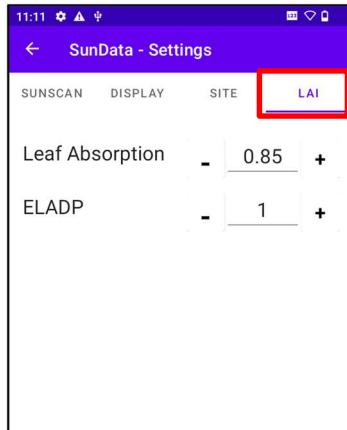

What to Measure and How

Experiment Design

This section discusses the factors that bear on your experimental objectives. It should help you answer questions like:

- What equipment do I need?
- What readings must be taken?
- Will I have to wait for particular times of day or weather conditions?

The type of study you propose to do will determine the time of year and duration of the experiment, and whether you are interested, for example, in monitoring growth by interception of solar radiation, or perhaps in the canopy structure as well.

Some canopy types (the non-uniform ones) preclude the use of the SunScan's direct LAI readout. You could, however, characterise the 3-dimensional light distribution within your canopy at different heights, or along transects through it. For brevity we call this approach "PAR mapping" in the discussion below.

Answers to the above questions are complicated, but the following should give you a good appreciation of the main issues involved.

Above-canopy reference requirements

This refers to measurements of PAR incident on the canopy, made at the same time as the below-canopy measurements. The question is whether to use a beam fraction sensor (BFS).

Use of a Beam Fraction Sensor e.g. BF5 Sunshine Sensor

A BF5 connected to the SunScan probe provides the best option, because you can operate with fewest restrictions. However, with some canopy types this may not be practical.

The next best option is to use the SunScan probe (without the BF5) sequentially above and below the canopy, but you may be restricted to times when the light levels are not changing fast.

See also **Take LAI Readings** on page 19.

Measuring Leaf Area Without a Beam Fraction Sensor


This is the most complicated option.

For an overview see **Take LAI Readings** on pages 19 & 20.

Each LAI reading below the canopy requires a previous **Incident** reading and a **Beam Fraction** reading above the canopy.

If measuring LAI without a Beam Fraction Sensor, SunData ensures you first measure **Beam Fraction** at least once. (This provides both the **Incident** Total and incident **Diffuse** radiation readings.)

For second and subsequent readings it is appropriate to just check the **Incident** total above the canopy, which is quicker. SunData does not insist you take more Beam Fraction readings, though you may do so if you wish.

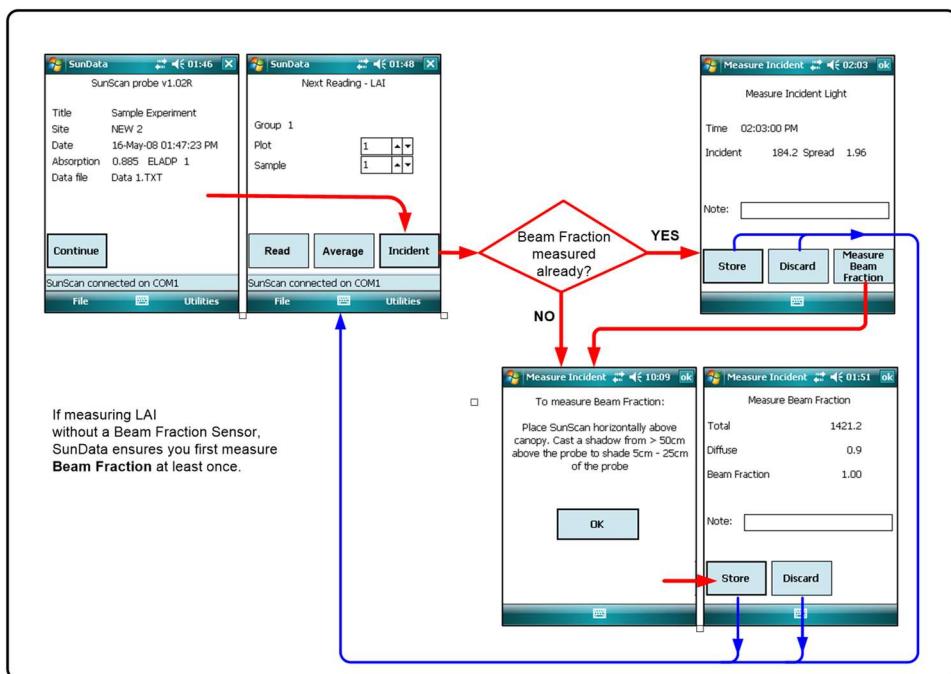

Measuring Incident Radiation

Hold the probe level above the canopy for this reading.

Measuring Beam fraction

Hold the probe level above the canopy as before, but now cast a small shadow from greater than 50 cm above the probe to shade 5 to 25cm of

the probe. Don't hold the shade too close to the probe - otherwise it will cut out some of the diffuse light as well.

SunData looks at the readings from the photodiodes and uses the lowest value to calculate the **Diffuse** component of the incident light. It uses the highest photodiode values to calculate the **incident** Total, and uses these two values to calculate and display the **Beam Fraction**:

The Beam Fraction reading is used to increase the accuracy of the calculation of Leaf Area Index, as explained in the LAI Theory section. However, this is a secondary effect, and you should not worry unduly about the second decimal place for the Beam Fraction value.

Direct and Diffuse components

Assuming that you make your above-canopy measurements on the SunScan (with or without a BF5), then the next table summarises whether you need to measure the Direct and Diffuse components of the incident light.

Type of study	Incident PAR Total only	Incident PAR Direct & Diffuse components
Fractional interception	Yes	No
LAI	No	Yes
PAR mapping	Yes	Possibly

Canopy type and BF5 practicalities

Canopy type is the next variable to be considered. As a general guide, the above-canopy reference measurements should be made close to, or above, the position of the SunScan probe.

Canopy type	Options	Comments
Low	BF5 connected, with extension cables or radio link	Radio link is generally best, long cables need management
Low	No BF5	Slower. Needs slow-changing light conditions.
High	Devise a portable BF5 mount. Use extension cables or radio link	Good when possible
High	Use clearings to get out from under the canopy. (No BF5 required)	Needs steady light conditions. Clearing light may be partly shaded
High	Use independent sensor for above canopy PAR	Needs slow-changing light, and possibly time average readings. LAI readings not available

Canopy type and LAI estimates

Some types of canopy do not conform well to the assumptions about canopy structure used by the SunScan in calculating LAI. The following table will give you an initial idea of whether it is applicable to your canopy. You should read the chapter on the LAI theory for a fuller appreciation of the subject. Some guidance on specifying values for the typical leaf angle (the ELADP parameter) and leaf absorptivity of your canopy comes later in this section.

Canopy type	Comments
Low, uniform (e.g. cereal crops, trial plots)	Good for LAI
Low, regular but not uniform (e.g. row crops)	Absolute LAI dubious. May show valid trends. PAR mapping
Isolated trees or bushes (e.g. orchard trees)	PAR mapping only
sparse vegetation (e.g. scrub)	PAR mapping only
high, uniform , not clumped (e.g. some timber plantations)	In principle good for LAI, but practical difficulties for above-canopy reference
high, clumped vegetation (e.g. natural woodland)	PAR mapping only

Canopy sampling volume

It is useful to be aware of the volume of the canopy that the SunScan is "seeing" when calculating LAI, so you can take this into account when planning your sampling scheme.

With the Direct beam, the SunScan only sees the canopy elements along a thin 1 metre wide sheet between the probe and the sun. With Diffuse light, the SunScan sees a much larger volume, covering a region centred on the probe, extending out approximately as far as the canopy is high, but with the canopy above the probe making the greatest contribution. These two very different sampling volumes are measured in the same proportions as the incident Direct and Diffuse light.

This means that in strong sun (high Beam Fraction) the canopy volume sampled is fairly small and well defined. As the Beam Fraction decreases, the volume sampled increases, and has less well defined limits.

Preferred light and weather conditions

These also will significantly influence your field operations.

Limitation	Comments
Time of day	Preferably within 3 hours either side of solar noon depending on the location and season, to meet the next two conditions.
Solar zenith angle	Measurements are easier when the sun is high. Probe and BF5 levelling errors become larger beyond zenith angles of greater than 60°, especially for LAI.
Incident light level - absolute	Preferably above about 200 $\mu\text{mol.m}^{-2.\text{s}-1}$. Accuracy degrades below this figure.
Light level - rate of change	With the BF5, avoid only the very fastest changes between bright sun and cloud. With no BF5: slow-changing conditions needed. For LAI, with no BF5, slow change of direct and diffuse components.
Full overcast, or full sun in blue sky	SunScan LAI model copes with both, but full sun will usually give the best results. Broken cloud is also satisfactory.

Advice on Absorption and ELADP values

Absorption

Absorption is the percentage of incident PAR absorbed by the leaf.

Most leaves have Absorption values in the range 0.8 - 0.9, so the default value of 0.85 will usually be appropriate.

Only adjust the Absorption value if you have good reason to, e.g. if working with very thick, dark leaves, or very thin transparent ones.


If you set the Absorption value to 1.0, the LAI calculations will be equivalent to simpler models that assume completely black leaves.

ELADP

ELADP is the Ellipsoidal Leaf Angle Distribution Parameter.

The ELADP is a way of characterising the horizontal or vertical tendency of leaves in a canopy.

The canopy leaf elements are assumed to be distributed in space in the same directions and proportions as the surface area of an ellipsoid of revolution, symmetrical about the vertical axis. The Leaf Angle Distribution can then be described by a single parameter, the ratio of the Horizontal to Vertical axes of the Ellipsoid.

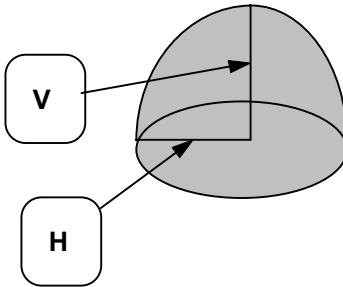

$$ELADP = H/V$$

This is also equal to the ratio of the vertically projected area to the horizontally projected area of the ellipsoid (or of the canopy elements).

- An ELADP of 1.0 gives a spherical Leaf Angle Distribution, where all leaf angles are equally represented.
- A high ELADP (e.g. 1024) represents a broad flat ellipsoid, i.e. the leaf elements are all horizontal
- A low ELADP (0.0) represents a tall thin ellipsoid, i.e. all the leaf elements are vertical.

Most crops have ELADPs in the range 0.5 - 2.0.

Setting ELADP

The default setting of 1.0 (spherical leaf angle distribution) is a good starting point.

If you are unable to estimate the ELADP any other way, set ELADP to 1.0. You can check how much this affects your results in the field by making several measurements in one place within a canopy using different ELADP values, and comparing the LAI values calculated.

Estimating ELADP in the field

If the canopy shows a clear predominance of horizontal or vertical leaves, then choose a small volume of the canopy that is representative. Count the number of leaves that are at more than 45° from the vertical (i.e. mostly horizontal), and the number of leaves that are less than 45° from the vertical. If the leaves are curved, pick the angle at the widest part of the leaf. The ELADP can be estimated as the number of horizontal leaves (N_h) divided by the number of vertical leaves (N_v), multiplied by $\pi/2$ (1.6).


$$ELADP = \frac{\pi N_h}{2 N_v}$$

The factor $\pi/2$ comes from the fact that the vertical leaves are distributed about the vertical axis, so for any light ray, some will be seen face-on, and some edge-on. In effect, the ellipsoidal distribution is being further approximated as a cylindrical distribution.

If you set ELADP to 1024, and Absorption to 1.0, the LAI calculations will be equivalent to the simple Beer's law inversion based on black, horizontal leaves.

Relationship between Mean Leaf Angle and ELADP

Wang & Jarvis (1988) describe the relationship between ELADP and the Mean Leaf Angle, which is sometimes known from other studies. Their results are summarised by the following graph:

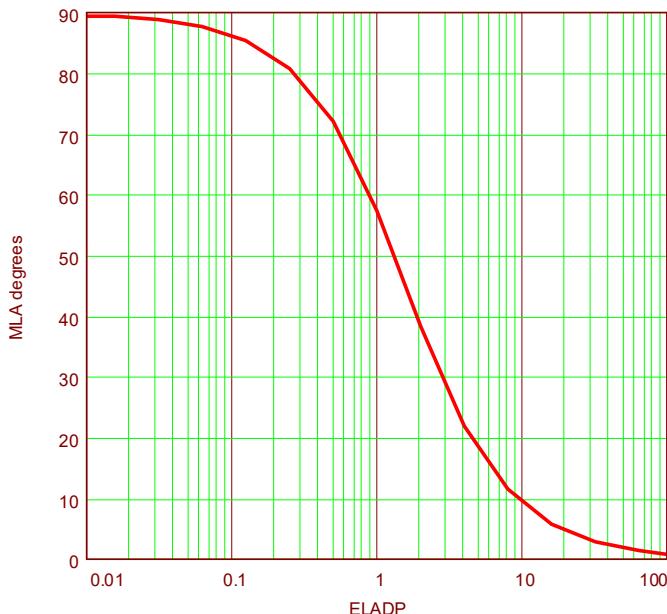

Typical ELADP Values

(from Campbell and van Evert, 1994)

Crop	ELADP	Crop	ELADP
Ryegrass	0.67-2.47	Cucumber	2.17
Maize	0.76-2.52	Tobacco	1.29-2.47
Rye	0.8-1.27	Potato	1.70-2.47
Wheat	0.96	Horse Bean	1.81-4.1
Barley	1.20	Sunflower	1.81-4.1
Timothy	1.13	White clover	2.47-3.26
Sorghum	1.43	Strawberry	3.03
Lucerne	1.54	Soybean	0.81
Hybrid Swede	1.29-1.81	Maize	1.37
Sugar beet	1.46-1.88	J. Artichoke	2.16
Rape	1.92-2.13		

SunScan Measurement modes

Having designed your experiment, choose which data collection option best suites your experiment, and whether you need a **BF5** sensor.

SunScan has three measurement modes: **LAI**, **PAR** or **ALL**.
Each can be used with or without a **BF5** connected.

If used with a stand-alone analogue data logger, the SunScan Probe acts as a simple line quantum sensor with only one analogue output, representing transmitted PAR.

See also: ***Experiment Design*** on page 31.

LAI, PAR and All - measurement modes

(Note: the values on the screens below, generated by the Emulator, are for illustration and may not be very realistic).

LAI Readings

Note: LAI readings are only available in this mode.

With BFS			Without BFS		
Reading 1 : 1	1:58:23 PM		Reading 1 : 1	2:58:16 PM	
Incident	2000.0	Zenith	Incident	2000.0	Zenith
Transmitted	802.1	Spread	Transmitted	524.3	Spread
Beam Fraction	0.29	LAI	Beam Fraction	0.73	LAI
Note: <input type="text"/>			Note: <input type="text"/>		
Store	Discard		Store	Discard	

PAR Readings

Average transmitted PAR, and the spread in individual photodiode PAR readings.

With BFS			Without BFS		
Reading 1 : 1	3:00:19 PM		Reading 1 : 1	3:01:42 PM	
SunScan Probe	415.5	Spread	SunScan Probe	1164.6	Spread
BFS Total	2000.0		BFS Total	1164.6	
BFS Diffuse	1469.0		BFS Diffuse	1164.6	
Note: <input type="text"/>			Note: <input type="text"/>		
Store	Discard		Store	Discard	

ALL Readings

Display is the same as for PAR, but data file also contains all the individual readings.

With BFS			Without BFS		
Reading 1 : 1	3:00:19 PM		Reading 1 : 1	3:01:42 PM	
SunScan Probe	415.5	Spread	SunScan Probe	1164.6	Spread
BFS Total	2000.0		BFS Total	1164.6	
BFS Diffuse	1469.0		BFS Diffuse	1164.6	
Note: <input type="text"/>			Note: <input type="text"/>		
Store	Discard		Store	Discard	

Measurement procedures in the field

Check the equipment a day or two before your field experiment for routine matters such as the state of the batteries and the internal desiccant. See the **Technical Reference** section on page 60 for details of these.

Probe handling in the field

Levelling the probe

The probe is fitted with a miniature bubble level to help you hold it level during the measurements.

In most situations under a canopy, exact levelling is not critical.



Try to minimise your own shading of the probe when taking readings. If the probe can "see" you, you will be blocking a certain amount of diffuse light from the sky. Casting a dense shadow on the probe by blocking the direct beam could cause significant errors.

Your best strategy will be to take as many samples as quickly as you can rather than aim for perfection with each reading. This will counter the spatial variability of most canopies, and is especially true if you have to work in unsteady light conditions.

When using the GO button, concentrate on getting the best levelling for the Read function which then "freezes" the reading.

It does not matter whether the probe is level when you press GO the second time to Store the reading.

Levelling is most critical when you are using the probe:

- for the incident radiation above the canopy, and
- when the direct solar beam is strong, and
- when the sun is low in the sky.

PDA Straps and Belts

In use the PDA is always connected to the SunScan via a curly cable, and both your hands are full.



Elastic Hand strap

An elastic strap provided as standard with each PDA helps secure it in your hand. This and a large pocket, may meet all your needs.



Protective Case type SS-PC1

Each PDA supplied by Delta T includes a carry case including a removable screen protection flap, an adjustable hand strap, a removable belt clip and a simple neck lanyard.

Note 1: The Belt clip may be left on your belt for docking the PDA when not in use. Unlike the Sacci belt PDA holder below, the PDA screen cannot easily be seen when clipped to your belt.

Note 2: Remove this belt clip when using this with the SS-HB1 Holster Belt

Holster Belt for PDA and SunScan Probe type SS-HB1

This optional belt has a sliding holster for the PDA and a simple docking cradle for SunScan.



Both PDA and SunScan can be quickly parked in their holsters, permitting two-handed annotation of readings and hands-free travel between measurements – unless you have a BF5 and tripod and cable attached as well!

Beam Fraction Sensor Handling in the Field

The Beam Fraction sensor is definitely recommended for taking most types of readings, however the extra cable connection to the standard SunScan probe does add an unwelcome practical complication!

Use of the BF5 radio link may be preferable.

Using the tripod

The BF5 has a tripod mount, which will probably be the most convenient mounting method to use above low field canopies (up to about 1.8 m high). If you are working with canopies higher than this, you will need to devise an alternative mounting method.

Levelling the BF5

The BF5 is equipped with a miniature bubble level. The tripod supplied has 3-axis adjustment to facilitate levelling.

It is more important to level the BF5 accurately than the probe.

Extension cables, and the location of the BF5

Extension cables of 5, 10 and 25 m can be fitted between the BF5 and SunScan, to extend your range of operation from the BF5. There is a trade-off between range and convenience: the greater your range, the fewer times you need to re-site the BF5, but the more time you are likely to spend handling the cable.

Extension cables can be joined together. A combination of two shorter cables may be preferable to one long one.

If connected by cable SunScan will read the BF5 and probe simultaneously.

If the different locations are widely spaced apart, the light levels could momentarily be different - cloud shadows can easily travel at 20 m.s⁻¹.

If connected by radio the BF5 signal is read up to 3 seconds before the probe reading is made.

The solution is to be aware of this in fast changing conditions and avoid taking readings at critical moments.

Very long cable lengths may introduce a small systematic error in BF5 readings.

Up to 100 metres, this should not be significant (< 10 $\mu\text{mol.m}^{-2}.\text{s}^{-1}$). At 200 metres it could add about 20 $\mu\text{mol.m}^{-2}.\text{s}^{-1}$ to the readings, which may need subsequent adjustment.

PAR calibrations

This section describes the basis for the light calibrations used in the SunScan system, and explains when and how you might want to recalibrate the probe or restore its factory calibration.

Factory light calibration

The SunScan probe and Beam Fraction Sensor are calibrated to give PAR readings which match those of a standard PAR quantum sensor in typical bright daylight conditions.

This matching cannot be made completely reproducible because an ideal PAR quantum sensor has perfect spectral and cosine responses whereas the SunScan probe and BF5 can only approximate to the ideal. However, for most normal usage, the SunScan calibration will be perfectly satisfactory, but if you are working under strong artificial lights (for example) you may need to contact Delta-T for advice.

SunScan readings of LAI and fractional interception depend for their validity on the ratio of the transmitted light to the incident light rather than their absolute values, so it is the matching between the probe and the BF5 calibration that is important.

Checking the probe/BF5 matching

It is good experimental practice to carry out this test in the field before (and after) taking a lot of readings.

- Mount the SunScan probe and your BF5 horizontally in uniform sunlight. Make sure the probe and BF5 dome is clean.
- In the SunData program, select the PAR display and take some readings.

The display will show you the values of the SunScan probe, BF5 Total and BF5 Diffuse readings. The SunScan and BF5 Total values should be approximately the same. Store these readings, and you will have complete results that you can refer back to later if needed.

The probe and BF5 Total readings may be within 5-10% of each other without greatly contributing to errors in canopies where the transmission is below 50%.

Errors from the mismatch are likely to be swamped by the magnitude of the variation in the samples. However, if you want to improve the matching, then proceed with the Recalibrate option.

The Recalibrate option

This option matches your probe to your BF5. **You cannot recalibrate the probe if you do not have a BF5 and you must only do this with a cable connection (not RadioLINK)**

- Set up the probe and BF5 as for the previous test.

- In SunData on the PDA tap the 3 vertical dots on the top right corner of the screen then select **Calibrate, Recalibrate SunScan**, then follow the instructions.

You should not expect to have to do this very often. The photodiodes and light measurement circuits are very stable.

The sources of the apparent variability mentioned above, between the probe and BF5, are:

- the not quite ideal cosine and spectral responses of the sensors
- any dirt and grime that builds up on the SunScan diffuser (so keep it clean).

You cannot recalibrate the probe when using the radio link. The function is disallowed because the light levels may not be the same.

Restoring the factory calibration

At any time after carrying out the Recalibrate option you can restore the original factory calibration. You do not have to set up the probe or BF5 in uniform light.

- In SunData on the PDA tap the 3 vertical dots on the top right corner of the screen then select **Calibrate, Restore Factory Calibration**.

You will briefly see a message confirming that this has been done.

Comparing the calibration with other PAR sensors

You can carry out matching comparisons between the probe and BF5 and any other PAR quantum sensor. You cannot reset the probe values to it, but you can annotate the readings and retain the comparison information in the SunScan data files.

The "Spread" measurement

The "Spread" value is a measure of the relative variation of the light along the probe. This is a useful parameter in light profiling measurements: it is the value of the **standard deviation of the 64 photodiode readings, divided by their mean**.

You can check the probe uniformity of calibration at any time by taking a reading in uniform light. The spread value should be 0.00 or 0.01.

Environmental and moisture protection

You should be aware of the different levels of protection of the components of the SunScan system to avoid putting them at risk when working outdoors. As with all field instruments you should minimise, as far as practical their exposure to high or rapidly changing temperatures.

The SunScan probe and Beam Fraction Sensor

Warning! The probe and BF5 are designed to resist dust and water jets (IP65), but they are not hermetically sealed. They will survive rainfall, but will not survive being immersed in water.

Avoid any situation where they could be flooded. Internal condensation will be avoided provided that you keep the desiccant fresh. Inspect the coloured indicator panels on the housings to check this.

The probe and BF5 are reasonably robust, but they do not have a drop test rating. Do not drop them! Take extra care when carrying the 1 metre-long probe!

The PDA

The PDA is extremely rugged, sealed to IP67, that is sealed against accidental immersion (submersible to 1 meter for 30 minutes).

The weakest link may be the 9 pin serial connector on the SunScan cable, which is not sealed .

LAI theory

In this section we shall explain as fully as we can how the SunScan computes its readings of leaf area index, and what the main limitations and provisos are in interpreting these for real canopies.

Ingredients of the LAI computation method

There are three broad areas contributing to the final result.

Geometric analysis

The first is the analysis of what happens to a ray of light passing through the canopy. In order to do this, we have to make some general assumptions about the canopy, i.e. uniformity, randomness and total absorption by canopy elements. This was done by Campbell (1986) for a beam of light from a single direction (the Direct solar beam) passing through a canopy with a generalised ellipsoidal leaf angle distribution function. This function allows a wide range of different canopy types to be described by the value of a single parameter ELADP.

Wood then integrated Campbell's result over the whole sky to give a description of the transmission of Diffuse light through the same canopy. This is important because the transmission of Diffuse light is different, and in reality there is usually a combination of both Direct and Diffuse illumination. In particular, the analysis shows that Diffuse transmission is strongly dependent on the leaf angle distribution, a point which has not generally been recognised.

These functions are integrals which do not have direct analytical solutions, so have to be solved numerically, and computable functions fitted to the results. This has been done to a high degree of accuracy, improving on Campbell's original approximation.

Incomplete absorption - more elaborate analysis

The above analysis based on black leaves is relatively straightforward. However, real leaves also reflect or scatter some of the light that falls on them. Typically, only about 85% of the incident light is absorbed. This means that in reality, every leaf element in the canopy is re-emitting light, as well as absorbing it, which makes the situation much more complicated.

Because the direction of any particular light ray can be changed by reflection or scattering, it means the spatial distribution of the light changes through the canopy. Therefore it is no longer adequate to consider just the vertical component of the light (as measured by a cosine corrected sensor), the horizontal component must also be included. This is why Wood's analysis also considers a hemispherical response sensor (which measures both horizontal and vertical components).

The relentless advance of computing power has made it possible to model the situation in ways that were not feasible in the past. By integrating the "black leaf" analysis into a computer model Wood has calculated the light levels in the canopy across the whole range of canopy and incident light parameters.

Equation fitting and inversion

The results of the computer modelling, while accurate, are not suitable for use in a field instrument. It takes many minutes of processing on a fast PC to calculate light transmission for any given conditions using the model, and the earlier data collection terminal previously supplied with SunScan was not a fast computer!. The model calculates values of light transmission for a given LAI, whereas the SunScan measures light transmission. This means that the functions have to be inverted to work back to LAI, which is more difficult.

To give you immediate results in the field, computable functions have been fitted to the model data, and it is these that are solved to give LAI to reasonable accuracy from the parameters measured by the SunScan system.

Note! Wood's SunScan equations are copyright, and you should not copy them without written permission unless for purposes of scientific debate or publication, in which case they should be fully acknowledged.

Theory versus reality

We believe that Wood's SunScan equations accurately reflect the assumptions that the modelling is based on.

By far the largest uncertainties are bound to be caused by

- the mismatch between the real canopy architecture and the simplifying assumptions built into the fundamental analysis
- to a lesser extent the uncertainty in the numerical values of ELADP estimated for your canopy.

With these caveats, the values of LAI for your canopy, even if of uncertain accuracy, will provide valid trends for a given canopy (e.g. canopy growth in a season), and valid comparisons between different canopies of similar architecture (e.g. trial plots of different cultivars of the same species). If you are able to compare SunScan estimates with actual harvested samples from time to time, this will enable you to calibrate out any systematic errors due to your canopy not matching the SunScan assumptions.

If you wish, you can force the SunScan calculations to be equivalent to older, less sophisticated inversions by setting some of the parameters to appropriate values. For example, setting ELADP to 1024 (horizontal leaves) and Absorption to 1.0 will give you the simple Beer's law inversion.

Derivation of Wood's SunScan canopy analysis equations

The major assumptions

- The canopy is an infinite, uniform, horizontal slab, with leaf elements randomly distributed in proportion to the surface area of an ellipsoid, as described by Campbell.
- The incident light consists of a component from a point source at a given zenith angle (the Direct beam); and a Diffuse component of equal intensity from every point in the sky (Uniform Overcast Sky).
- The canopy either has sufficiently high LAI that light reflected back from the ground below is negligible, or the reflectance of the ground is similar to that of the canopy.
- Of the light intercepted by the leaf element, a fraction **a** (absorption) is totally absorbed. The remainder is re-emitted uniformly in all directions.

Beer's law for canopy absorption

Beer's law occurs in many situations where events happen at random. In the case of light absorption by a canopy, it applies to the absorption of incident photons or light rays. For a uniform infinite randomly distributed canopy of completely absorbing leaves, it can be shown that the relationship between the transmitted light I , a beam of incident light I_0 and the Leaf Area Index L is given by:

$$I = I_0 \cdot \exp(-K \cdot L)$$

where K is the extinction coefficient which depends on the leaf angle distribution and the direction of the beam. $K=1$ for entirely horizontal leaves.

Campbell's Ellipsoidal LAD equations.

Campbell (1986) derives an equation for the extinction coefficient of leaves distributed in the same proportions and orientation as the surface of an ellipsoid of revolution, symmetrical about a vertical axis. The semi vertical axis is **a** and the semi horizontal axis is **b**. There is symmetry about the vertical axis. He relates these to a single parameter $x = b/a$. (x is the Ellipsoidal Leaf Angle Distribution Parameter, or ELADP). The extinction coefficient also depends on the zenith angle of the incoming direct beam. Canopy elements are assumed to be completely black, and randomly distributed in a horizontal slab extending to infinity in all directions.

Note: in the following equations derived in MathCAD, different conventions are used for some symbols. Equality is represented by $=$, and $\tan^2(\theta)$ is expressed $\tan(\theta)^2$.


The extinction coefficient, K , is calculated as follows:

$$K(x, \theta) := \frac{\sqrt{x^2 + \tan(\theta)^2}}{x + 1.702 \cdot (x + 1.12)^{-0.708}}$$

Where:

x is the ELADP

θ is the zenith angle of the direct beam.

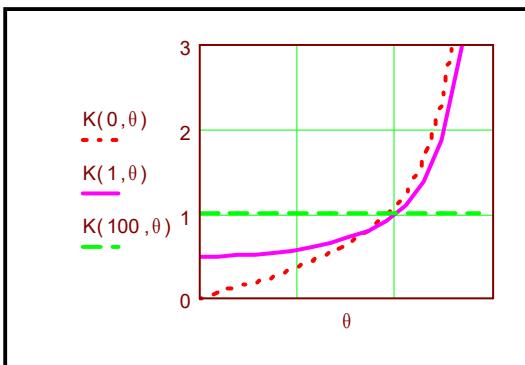

The transmitted fraction of incident direct light is given by:

$$\tau_{\text{dir}} := \exp(-K(x, \theta) \cdot L)$$

where L is the canopy LAI.

Transmission of Diffuse Light

Campbell's analysis applies only to a beam of light from a specific direction, which is the Direct solar beam in our case. Even under strong sunlight, the Direct fraction rarely exceeds 80% of the Total incident radiation, so penetration of the Diffuse component of incident radiation is also important.

There is a misconception that the extinction coefficient for Diffuse light is independent of canopy Leaf Angle Distribution, but this is not the case as the following analysis shows. As the following graph also shows, transmission of Diffuse light does not obey a simple Beer's law curve, so cannot be represented by a single extinction coefficient, except in the case of a horizontal LAD.

The next section derives the transmission of light from a uniform overcast sky through a uniform infinite canopy of black leaves of constant LAI with an ellipsoidal leaf angle distribution.

Let the sky have uniform brightness of 1 per steradian over the hemisphere.

The radiance of a strip around the sky at angle θ is given by:

$$R = 2 \cdot \pi \cdot \sin(\theta) \cdot d\theta$$

and the irradiance on a horizontal surface due to that strip is given by:

$$I_0 = 2 \cdot \pi \cdot \sin(\theta) \cdot \cos(\theta) \cdot d\theta$$

The total irradiance due to the hemisphere is obtained by integrating over the complete sky area:

$$\int_0^{\frac{\pi}{2}} 2 \cdot \pi \cdot \sin(\theta) \cdot \cos(\theta) d\theta = 1 \cdot \pi$$

For each strip of sky, the transmitted radiation is given by:

$$I = I_0 \cdot \exp(-K \cdot L)$$

where **K** is the extinction coefficient from Campbell,
so, the total transmitted radiation is


$$I = \int_0^{\frac{\pi}{2}} 2 \cdot \pi \cdot \sin(\theta) \cdot \cos(\theta) \cdot \exp(-K(x, \theta) \cdot L) d\theta$$

and the transmission fraction τ is given by I/I_0

$$\tau_{\text{diff}}(x, L) := \frac{1}{\pi} \int_0^{\frac{\pi}{2}} 2 \cdot \pi \cdot \sin(\theta) \cdot \cos(\theta) \cdot \exp(-K(x, \theta) \cdot L) d\theta$$

This integral was evaluated numerically over the range $x = 0$ to 1000 and $L = 0$ to 10, and is graphed below for three different values of x .

Diffuse light transmission (cosine corrected sensor)

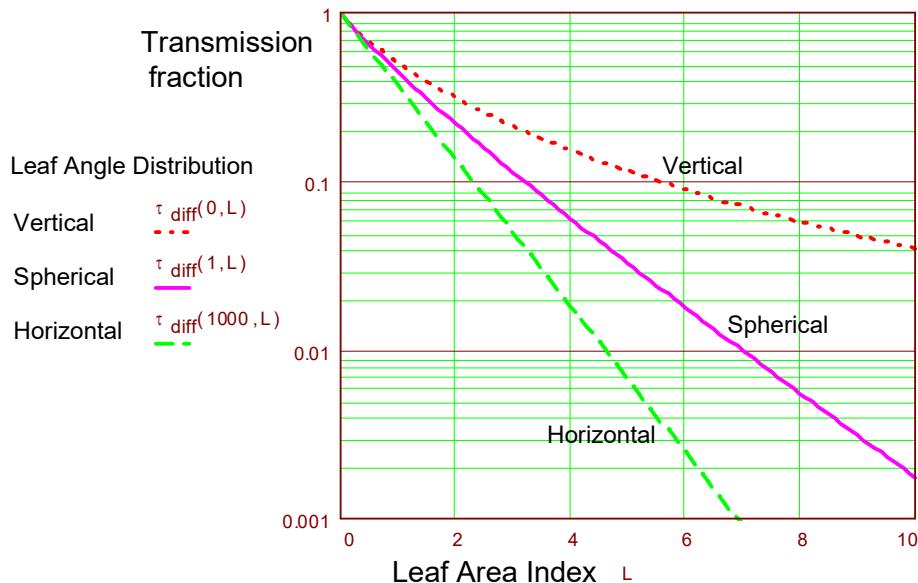

Modelling the canopy transmission

Accounting for incomplete absorption of PAR by the canopy elements, and scattering of light within the canopy is complicated. It is no longer sufficient to consider only the vertical component of PAR (i.e. as measured by a cosine-corrected sensor) because scattering effectively transfers power between the horizontal and vertical components, so the canopy changes the spatial distribution of power in the PAR flux as it is transmitted down through the canopy and reflected back up.

A multi-stream computer model was set up to calculate these effects as follows.

Assumptions

- The canopy is an infinite, uniform, horizontal slab, with leaf elements randomly distributed in proportion to the surface area of an ellipsoid, as described by Campbell.
- The incident light consists of a component from a point source at a given zenith angle (the Direct Beam); and a Diffuse component of equal intensity from every point in the sky (Uniform Overcast Sky).
- The canopy either has sufficiently high LAI that light reflected back from the ground below is negligible, or the reflectance of the ground is similar to that of the canopy.


- Of the light intercepted by the leaf element, a fraction a (absorption) is totally absorbed. The remainder is re-emitted uniformly in all directions.

In detail:

- The canopy is divided into horizontal layers of LAI 0.1
- Direct beam absorption by each layer is calculated using Campbell's equation. In calculating the amount of absorbed light that is re-emitted, the total power in the direct beam has to be used (i.e. as measured by an integrating hemisphere or a cosine-corrected sensor perpendicular to the beam). The amount intercepted by the layer is the difference between the absolute intensity above and below the layer.
- Diffuse light intercepted by the layer is calculated in a similar way, taking into account the incident Diffuse light, and the sum of re-emitted light from all other layers, attenuated by the intervening layers. This is done for both down welling and upwelling Diffuse light. A fraction of the Diffuse light absorbed by the layer is also re-emitted. Again, absolute rather than cosine-corrected intensity measurements must be used.
- Both cosine-corrected and absolute light measurements are calculated for each layer, and the model iterated until it converges. This has been done for a range of different values of zenith angle, Direct/Diffuse ratios, Leaf Angle Distributions and Absorptions.

Simpler functions have been found to approximate these results, and are used in the SunData software when inverting transmitted fraction back to LAI. These are described in detail in the next section.

The canopy model

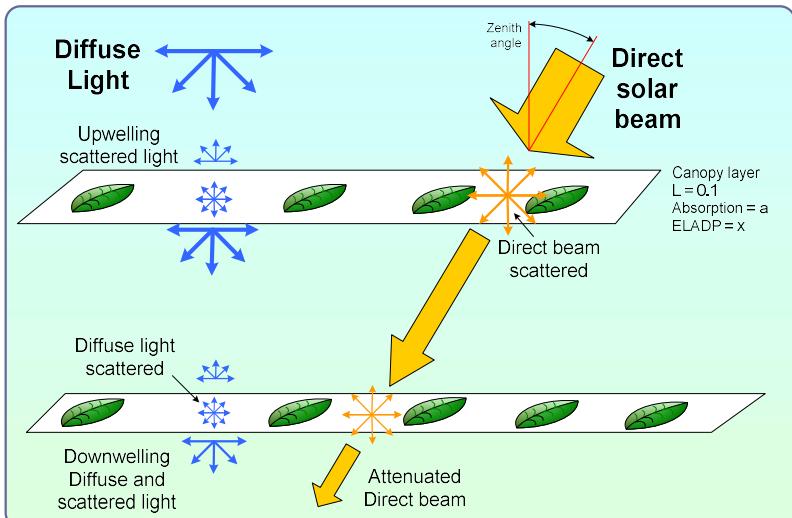

Accuracy of LAI calculations

When used to predict LAI from transmitted fraction, the functions used in the SunData software are accurate to within $\pm 10\%$ ± 0.1 over the range of LAI less than 10 and Zenith Angle less than 60° when compared to the output of the full model.

The errors become larger for highly vertical leaves with a strong low sun, and users should avoid these conditions if possible.

In practice, the greatest errors are likely to follow from the differences between the real canopy and the idealised assumptions in the model.

Functions used to model canopy transmission

Diffuse light - cosine response sensor

The transmission of diffuse light through a canopy, as measured by a cosine corrected sensor, can be modelled by the following functions:

Given:

$$A(x) := \frac{1}{0.15 \cdot x^{1.38} + 0.007}$$

$$B(x) := 4.32 + 2.60 \cdot \exp(-2.75 \cdot x)$$

$$C(x) := 0.57 - 0.23 \cdot \exp(-1.40 \cdot x)$$

Then

$$\tau_{\text{diff}}(x, L) := \exp(-L) + A(x) \cdot L^3 \cdot \exp(-B(x) \cdot L^{C(x)})$$

These curves give maximum errors of 0.009 in τ_{diff} , with a maximum 6% error for τ_{diff} greater than 0.01 over the range $L = 0$ to 10 and $x = 0$ to 1000.

Diffuse light - hemispherical response sensor.

The previous analysis of diffuse light transmission is appropriate for a cosine-corrected sensor as it only considers the vertical component of the incident and transmitted light. This works as long as the leaf absorption in the PAR band is complete, and there is no scattering of the incoming light.

When we consider leaves with incomplete PAR absorption, some of the absorbed light is re-emitted in different directions to the original incoming light. Because of this we have to account for all of the incoming light, both horizontal and vertical components, and also be aware that the spatial intensity distribution of the light is modified by the canopy and varies through the canopy depending on the canopy leaf angle distribution.

The above analysis is now repeated to find the transmission of uniform diffuse light as measured by a sensor with a hemispherical response. The equivalent equation for the transmission fraction is:

$$\tau_{\text{spher}}(x, L) := \frac{1}{2 \cdot \pi} \cdot \int_0^{\frac{\pi}{2}} 2 \cdot \pi \cdot \sin(\theta) \cdot \exp(-K(x, \theta) \cdot L) d\theta$$

This was again calculated numerically and curves fitted to the data with similar accuracy as above. The curves fitted are:

Given:


$$P(x) := 1 + 0.4 \cdot \exp(-0.1 \cdot x) \cdot (\operatorname{atan}(0.9 \cdot x) - 0.95)$$

$$Q(x) := 0.255 \cdot \operatorname{atan}(x) + 0.6$$

$$R(x) := \exp(-x)$$

$$\tau_{\text{spher}}(x, L) := \exp[-P(x) \cdot (L^{Q(x)} + R(x) \cdot \ln(1 + L))]$$

Diffuse light transmission (hemispherical response sensor)

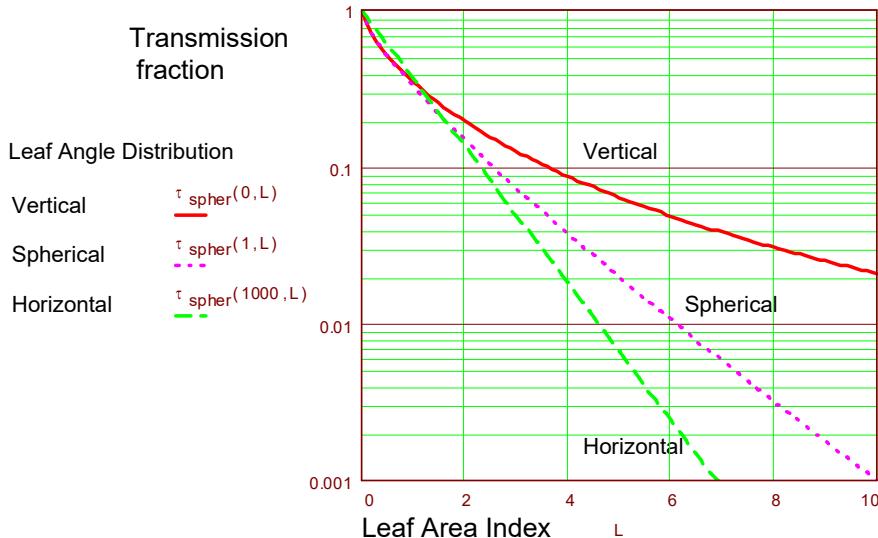

Modelling incomplete PAR absorption and scattering

Radiation models have been used for many years to calculate the effects of scattering in the canopy e.g. Norman & Jarvis (1975). Wood's model incorporates Campbell's ellipsoidal leaf angle distribution and the effects this has on transmission of both Direct and Diffuse light.

The model splits the canopy into layers of LAI 0.1, extending to a sufficient depth to absorb all of the incident light. Incident light above the top layer was a known fraction of Direct (at a given zenith angle) and Diffuse light. The amount of light absorbed by a layer, assuming completely black leaves, was calculated. The fraction of this absorbed light re-emitted by the leaves was then assumed to be re-emitted in all directions uniformly (see Monteith & Unsworth, 1990, p85 onwards).

The light level at any point in the canopy is then calculated assuming complete absorption, plus the sum of the light re-emitted by each canopy layer, attenuated by the intervening layers.

These calculations had to take full account of both horizontal and vertical light components. This involved an iterative solution and a lot of computer time. Finally, the light intensity as measured by a cosine corrected sensor was calculated.

The results were then analysed in terms of L_a , the LAI of a canopy of black leaves that would give the same transmission as a canopy of LAI L assuming incomplete absorption, all other factors being equal.

$$L_a = L \cdot (1 - g(1 - a))$$

L is the "true" LAI,

L_a is the LAI that when used in the black leaf model, gives the same transmission as L used in the complete model.

a is the leaf absorptivity in the PAR band.

The function g varied with all the other parameters in a complex way, but most strongly with x , the leaf angle distribution parameter, and with solar zenith angle for the direct beam. The following equations represent quite a crude approximation to the full model, but give satisfactory results for most situations. If any given transmission fraction is inverted using the approximation, the LAI calculated is within $\pm 10\% \pm 0.1$ of the "true" LAI indicated by the full model, except for x near 0 (extreme vertical leaves) and zenith angle $> 60^\circ$ (strong low sun).

For diffuse light: $g_{\text{diff}} = 0.5$

For direct beam: $g_{\text{dir}} = \exp(-1.5 \cdot x) \cdot (-0.2 + 0.7 \cdot \text{zen}^2) + 0.2 \cdot \text{zen}^5 + 0.3$

where: x

is the ellipsoidal leaf angle distribution parameter

zen is the solar zenith angle in radians.

The full equation thus becomes:

$$\tau = f_b \cdot \exp \left[-K(x, \theta) \cdot \left[1 - g_{\text{dir}}(1 - a) \right] \cdot L \right] \dots \quad \text{Direct}$$
$$+ (1 - f_b) \cdot \left(\exp(-L_a) + A(x) \cdot L_a^3 \cdot \exp(-B(x) \cdot L_a^{C(x)}) \right) \quad \text{Diffuse}$$

This looks hard to invert to get LAI from τ , but an iterative solution is fairly straightforward given the computing power, and is much simpler than the full numerical solution.

Calculating zenith angles

Zenith angles are calculated from latitude, longitude, and local time using standard astronomical equations as given in Practical Astronomy. These give zenith angles accurate to better than 0.1° and times of sunrise or sunset to within a few seconds.

Summary

A computer model has been created which calculates accurately the transmitted light below the canopy based on the assumptions given. This has been run over the whole range of each of the different variables, i.e. Direct beam angle, Direct beam fraction, Leaf Angle Distribution, Leaf Absorption and Leaf Area Index. The results of these runs, taking many hours of computer time, have been collected and functions found to fit them.

These approximating functions are used in the SunData software to predict LAI from the measured inputs in the field. The LAI values calculated by the SunData software are within $\pm 10\% \pm 0.1$ of the LAI that would have been calculated by the full model.

Scientific references

Campbell G S (1986). *Extinction coefficients for radiation in plant canopies using an ellipsoidal inclination angle distribution*. Agric. For. Meteor., 36:317-321.

Campbell G S and F K van Evert (1994) *Light interception by plant canopies: efficiency and architecture*. In J L Monteith, R K Scott, and M H Unsworth, *Resource Capture by Crops*, Nottingham University Press.

Campbell G S and J M Norman (1998) *An Introduction to Environmental Biophysics*. Springer–Verlag.

Daughtry, Craig S T (1990). *Direct measurements of canopy structure*. Remote Sensing Reviews 1990 vol 5(1) pp 45 - 60.

Diffey B L (ed). (1989) *Radiation Measurement in Photobiology*. Academic Press.

Goudriaan J (1977). *Crop Micrometeorology: A Simulation Study*. Centre for Agricultural Publication Documentation, Wageningen, Netherlands.

Jones, Hamlyn G. (1992) *Plants and Microclimate* second edition. CUP.

Lang A R G & Xiang Yueqin (1986). *Estimation of leaf area index from transmission of direct sunlight in discontinuous canopies*. Agric. For. Meteor. 35:83-101.

Lang A R G, Xiang Yueqin, & Norman J M (1985). *Crop structure and the penetration of direct sunlight*. Agric. For. Meteorol. 35:83-101.

Marshall B and Woodward F I (eds). (1985) *Instrumentation for Environmental Physiology*. SEB Seminar series 22, CUP.

Monteith J L & Unsworth M H. (1990) *Principles of Environmental Physics* second edition. Edward Arnold (Hodder & Stoughton).

Norman J M & Welles J M (1983). *Radiative transfer in an array of canopies*. Agron. J. 63:743-748.

Norman J M and Jarvis P G (1975). *Photosynthesis in Sitca Spruce (Picea sitchensis (Bong) Carr.) V. Radiation penetration theory and a test case*. J. Appl. Ecol., 12:839-878

Russel G, Marshall B and Jarvis P (eds). (1989) *Plant Canopies, their Growth, Form & Function*. SEB Seminar series 31, CUP, Cambridge

Wang Y P and Jarvis P G (1988). *Mean leaf angles for the ellipsoidal inclination angle distribution*. Agric. For. Meteor., 43:319-321.

Welles J M (1990). *Some indirect methods of estimating canopy structure*. Remote Sensing Reviews 1990 vol 5(1) pp 31 - 43.

Technical Reference

Maintenance

Batteries

Apart from the PDA, all the components of the SunScan system are powered by alkaline 1.5V AA cells. Do not substitute other types of cell.

Checking the batteries

The SunScan system requires batteries within the probe, in the PDA, in the BF5 and any BF-RL4 radio link if attached.

- Always check battery levels before using the equipment.
- Replace SunScan system batteries on a 6 to 12-month cycle. Different components can exhaust their batteries at different rates.

SunScan Probe batteries

The probe is powered by four 1.5V AA size alkaline cells mounted within the probe handle.

- Select the 3 vertical dots in the top right-hand corner, select **About** in SunData to display the SunScan battery voltage.
- Replace the batteries when the level has fallen near to 4.7 V level for non-radio operation, or 5 V when used with a radio.

The probe circuit automatically "sleeps" when no readings are being taken. There is no probe on/off switch.

Probe battery life

With a fresh set of batteries in the probe, you could take about 300,000 readings. Unused, the batteries would last for about 6-12 months.

Warning! If you are likely to store the probe for a long period, you should remove the batteries.

Replacing the probe batteries

You must dismantle the probe handle. Disconnect the BF5 and the probe's RS232 cable. The baseplate of the probe is secured to the handle by 4 crosshead corner screws. Unscrew these to remove the handle, whilst carefully supporting the probe. The battery holder can now be prised out of its compartment, and the batteries changed.

SunScan Probe SS1-RL4

The probe is powered by 4 x AA cells. These should give about 500 hrs operating time with radio usage.

- Replace the batteries when the level has fallen near to 5 V (or 4.7 V level for non-radio operation).

BF5 radio transmitter BF5-RL4

The transmitter is powered by 4 x AA cells. These should give 500 – 1000 hrs operating time. To check the battery:

- Depress the on/off button. After a few seconds the red LED will flash at 3-second intervals.
- If no flash occurs, undo the four case screws, and fit or replace the 4 alkaline AA cells in the battery holder.
- For an indication of the remaining battery life, you will need a voltmeter. Open the case, and measure the battery voltage with the transmitter module powered.
- Replace the batteries when the voltage nears the recommended end point of 5V.

Sunshine Sensor BF5

The BF5 is powered by 2 x AA cells. These should give typically about one year's lifetime. (The BF5 battery check is fully detailed in the BF5 manual.)

To check the battery voltage:

- Run **SunRead** in your PC and communicate with the BF5 through its RS232 cable. The battery voltage is reported.
- Alternatively, open the BF5 case (undo the four corner screws) and measure the BF5 battery voltage with a voltmeter.
- Replace the batteries when their voltage drops to 2 V.

PDA batteries

Checking the PDA battery levels

Drag down from the top of the screen and you can see the battery power remaining (%) in the top right-hand corner.

PDA Battery Life

The PDA is supplied with a rechargeable 3.6V 6600mAh 23.76Wh battery providing 17h51m (all RF on) of battery life. Frequent backlight usage, heavy use of an 802.11g(WLAN) radio, high power consumption CF cards and cold temperatures can all significantly reduce battery life.

*See your PDA ***user manual*** for more information.*

Desiccant

The SunScan probe, BF5 and BF5-RL4 transmitter module each contain desiccant packs. The desiccant packs must be refreshed from time to time to avoid the possibility of condensation within the instruments.

The dryness of the desiccant pack may be indicated by a coloured panel on the instrument. Blue indicates dry, pink indicates that renewal is needed. Otherwise, it is good practice to exchange the desiccant pack for a fresh one whenever the instrument case is opened - for example when replacing the batteries.

Refreshing the desiccant

The desiccant pack can be regenerated by heating. Remove the pack from the probe or BF5 and heat the pack in an oven for a few hours at about 90°C, then allow it to cool down away from moisture before reinstalling it.

Checking the PAR calibration

Various techniques for checking the SunScan system PAR calibration and consistency are described in **Checking the probe/BF5 matching** on page 44, which you should refer to. This also includes advice on when to use the recalibrate and restore factory calibration procedures.

Factory calibration method

A standard PAR Quantum sensor provides the reference value of PAR that the Beam Fraction sensor and the SunScan probe are set up to. This process is carried out under a near-daylight spectrum lamp in controlled conditions.

Re-setting the factory calibration

The electronic components and photodiodes used in the PAR circuits of the Beam Fraction sensor and SunScan probe are very stable and are not expected to change for the lifetime of the instrument.

Circuit adjustment facilities in the Beam Fraction sensor are provided for the initial factory set-up and are not intended to be used for routine adjustment thereafter. The probe factory calibration cannot be adjusted without specialist equipment.

Warning! Do not attempt to change the factory calibration without referring back to Delta-T first.

The most likely cause of an apparent change of calibration is physical: dirt or scratching on the BF5 dome, or dirt or staining on the SunScan diffuser.

To clean, use warm soapy water, or isopropyl Alcohol in the event of very stubborn deposits.

If after checking the above you still have:

- a Beam Fraction sensor with badly matched Total and Diffuse outputs, or
- a SunScan probe with an out-of-spec calibration, or individual diode readings that appear faulty,

then please refer back to your distributor or the factory.

Troubleshooting

While running SunData

SunData reports “SunScan probe not connected”.

- Check the cable connections. Check the condition of the batteries in the SunScan probe. Change as a precaution.

SunScan or BF5 give inconsistent light readings.

- Make sure the desiccant condition indicators are blue.
- See the advice on PAR calibration in **Measurement Options** on page 44.

Radio Link is not connecting, or range is low.

Does the SunScan system work in the normal way without the radio link, using the BF5-SS1-05 cable?

If not, the problem is with the SunScan system, see above.

If so, the problem is confined to the radio link operation, please consult the sections below.

BF5 Check

This is a quick check for the BF5 only using the SunRead PC software. The BF5 does not have any radio components in it, but is useful for verifying the operation of other components.

- ◆ Disconnect any EXT/8w-xx cable.
- ◆ Connect the BF5 to a PC running SunRead, with the RS232 cable (DCT-COM) via a COM port. This will interrogate the BF5 at 3-second intervals and give real-time readings for Total and Diffuse light levels.
- ◆ Expose the BF5 dome to a source of bright light – preferably daylight.

Check that:

- ◆ The light units are set to PAR
- ◆ The real-time values of Total and Diffuse PAR are sensible.
- ◆ The stated battery level indication is ok.

If any of these are not correct, open the BF5 to check batteries and inspect for any hardware problems or faults.

BF-RL4 Transmitter Check

- ◆ Connect the BF-RL4 to a tested BF5 (without an EXT/8w-xx cable).
- ◆ Check the BF-RL4 antenna is correctly plugged in to the BNC connector.
- ◆ Depress the button to switch on. The BF-RL4 red LED should flash at intervals of 3 seconds.

Symptom	Cause or comment
BF-RL4 LED fails to flash	Check that the on/off button is latched in the depressed (on) position. Check the batteries and the battery pack connector. Check that the internal LED PCB connector is in place.
BF-RL4 gives single flashes, but BF5 LED fails to flash	Check the RS232 cable and D-connector and its internal connections in the BF-RL4 module.
BF-RL4 gives double flashes	Normal operation with working BF5 connected to the BF-RL4. The double flash indicates that the BF-RL4 is receiving a valid RS232 stream from the BF5.

SS1-RL4 Probe Check

First check the normal operation of the SS1-RL4 probe connected to a PDA, using the EXT/8w-05 cable and a pre-tested BF5.

Then:

- ◆ Disconnect the EXT/8w-05 cable.
- ◆ Fit the radio antenna to the BNC connector on the probe handle.
- ◆ Operate the pre-tested BF-RL4 connected to the BF5, at close range (up to 5m distance) preferably in daylight conditions.
- ◆ If indoors, make sure both the probe and the BF5 are exposed to a source of bright light.
- ◆ Check for the correct operation of the indicator LEDs on the BF-RL4 and the BF5.
- ◆ With the PDA display set for PAR readings, take some occasional readings at half-minute intervals and observe the activity of the probe LED.

After a few single flashes, the probe should “lock on” to the transmitted radio signal and simultaneously give a double flash.

Observe the magnitude of the PAR light readings displayed on the PDA.

Symptom	Cause or comment
Probe LED gives single long flash only. No double flash.	Failed to find a transmission. Repeat the antenna connection checks on both probe and transmitter.
Probe was locked on, but then gives single short flashes followed by a long flash.	Normal search mode indication. The transmitted signal has stopped, or become too weak to be received.
Probe LED fails to flash.	Radio link receiver circuit in probe is suspect. Dismantle the handle and inspect for obvious hardware faults
Probe is locked on, but first reading shows Total and Diffuse PAR values of 0.2 μmol	The very first reading under radio link operation is near zero. Subsequent readings will be correct for the light exposure.
Probe disconnected from PDA, but probe LED remains on.	Normal operation. The probe receiver stays listening on the radio link for 15 minutes. Turn off the transmitter after use.
“SunScan probe not connected” or “communication error” messages are frequent	Check the probe batteries. Possible environmental RF interference so move to a different location.

Optimising the Range

◆ **Field Terrain:** If the field terrain is not level, consider the best location to give good line of sight to all parts of the crop within a range of about 100-200m. This will minimise the number of times you have to move the BF5 to a new location.

◆ **The weather and the light.** For the SunScan LAI estimates to work correctly, the BF5 must register the incident light levels at the location of the *SunScan probe*.

In some weather conditions (e.g. fast-moving cloud shadows) this will no longer be true if you move too far away from the BF5. So you should:

- Stay closer to the BF5 and relocate it more frequently.
- Check the local incident light level by holding the probe above the canopy. If it is significantly different from the BF5 Total reading, then wait until the light conditions of both have equalised again.
- Bear in mind that the BF5 signal is read up to 3 seconds before the probe reading is made.

◆ **The properties of the foliage within the canopy.** The radio signal strength reaching the bottom of the canopy is reduced by the density and wetness of the foliage and by proximity to the ground surface.

After you receive the signal with the probe above the canopy (double flashes), move the probe below the canopy as quickly as possible to take the transmitted reading.

Then bring the probe above the canopy again, and wait until the double flash shows again before taking the next reading.

Even if the probe immediately indicates the loss of the signal (single flash) below the canopy, it will retain and use the previous BF5 reference readings. You have about 15 seconds in which to do this, but don't delay.

PDA has lost SunData software

Re-install SunData software

SunData comes pre-installed on the PDA as standard. As such, when you receive the SunScan system you can power up and get started.


If the SunData software has been lost (perhaps by performing a factory reset on the PDA), then you will need to reload the SunData software onto the PDA.

First of all, establish a connection using your desired connection type (cable, USB stick or cable, described above).

The procedure below is specific to the USB memory stick connection but the process is similar, regardless of the connection type:

First you will need to download the SunData PDA files from our website:
<https://delta-t.co.uk/product/sunscan/#support>

Once you have downloaded the files transfer them onto your USB memory stick:





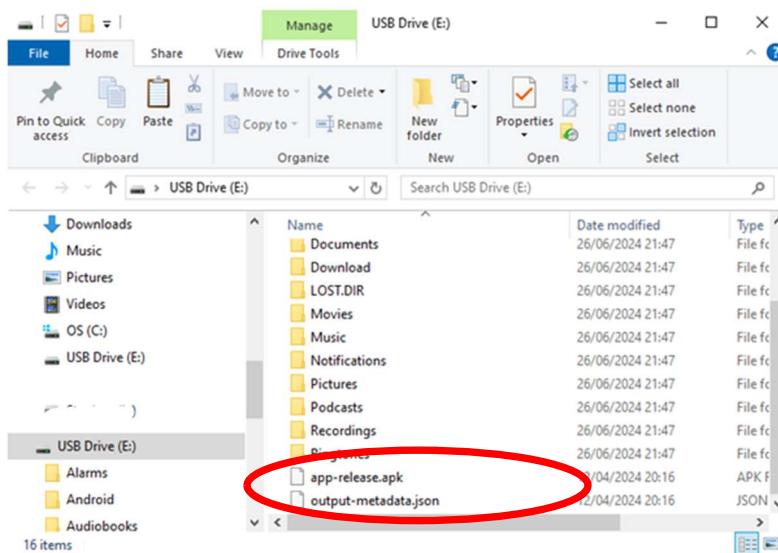




You then need to plug the USB stick into the PDA so you can run the *.apk file.

Note: If it is the first time you have plugged the USB stick into an android device, you may need to format it first (see “USB port” instructions earlier in the user manual).


Insert the ‘SunData Software’ USB stick into ‘USB A’ socket.

KEY	
	Press
	Press and Hold
	‘Swipe’ (In direction of the arrow)

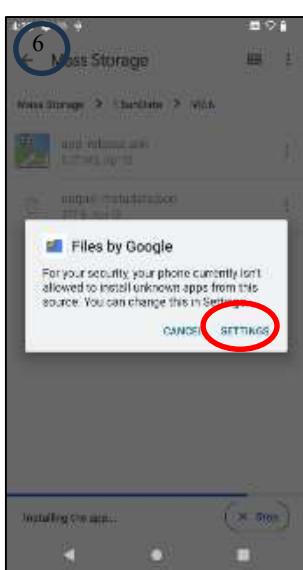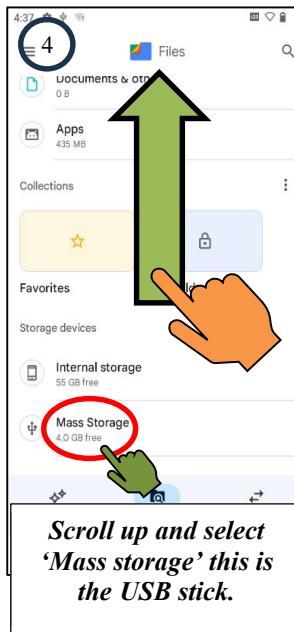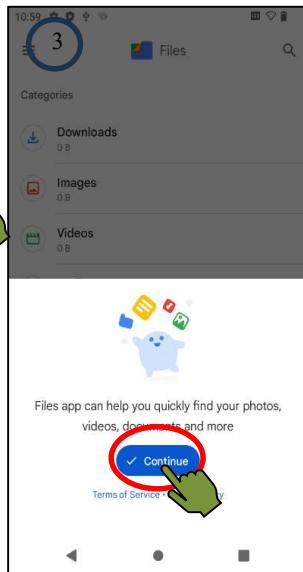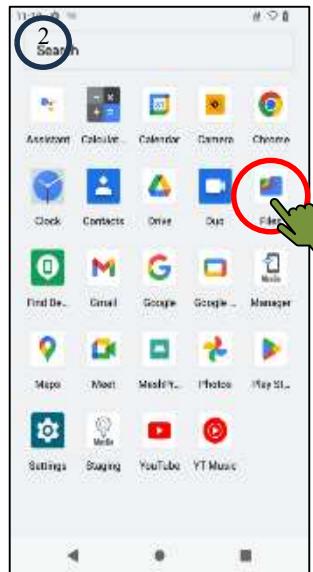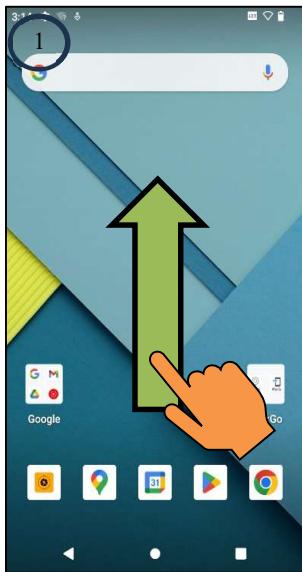

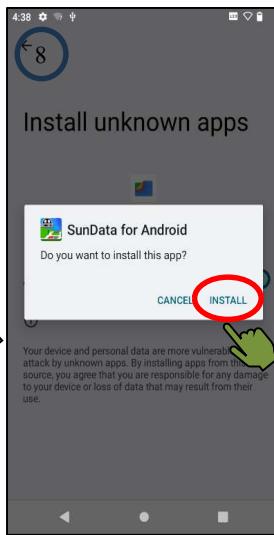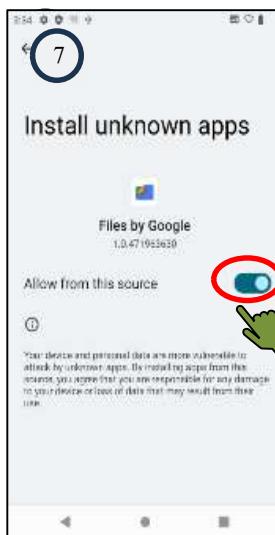

After this step remove
the USB stick

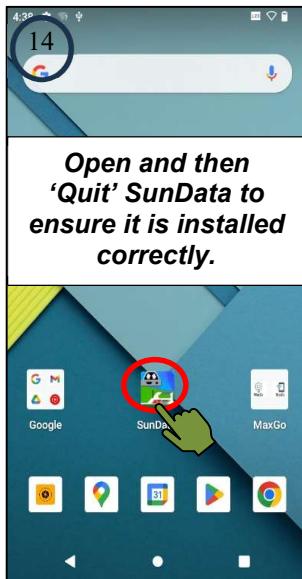

Problem Reports

It will help considerably if you can send as much relevant detail as possible. In particular:

- a description of the fault, its symptoms, or error messages
- what components of the SunScan system you are using
- details of any PC you are using.
- software version numbers and hardware serial numbers (see below)

Version and serial number location

SunData S/W programs:

In SunData program tap on the 3 vertical dots in the top right-hand corner and select **About**.

SunScan probe

The serial number label is on the side of the probe handle.

The PROM chip (inside the probe handle) is labelled with its version number. This can also be seen at the top of the SunData title screen when the probe is connected.

Beam Fraction Sensor

The serial number label is on the underside of the case.

Specifications

SunScan Probe type SS1

Active area	1000 x 13 mm wide. Sensor spacing 15.6 mm
Spectral response	400 - 700 nm (PAR)
Measurement time	120 ms
Maximum reading	2500 $\mu\text{mol} \cdot \text{m}^{-2} \cdot \text{s}^{-1}$
Resolution	0.3 $\mu\text{mol} \cdot \text{m}^{-2} \cdot \text{s}^{-1}$
Linearity	better than 1%
Accuracy	+/- 10%
Analogue output	1 mV per $\mu\text{mol} \cdot \text{m}^{-2} \cdot \text{s}^{-1}$
Serial interface	RS232, 9 pin female 'D' connector
Environmental	protected to IP65, 0° - 60°C working temperature
Size (overall)	1300(l) x 100(w) x 130(h) mm
Power	4 x AA Alkaline cells (lifetime up to 1 year)

Beam Fraction Sensor type BF5

See **BF5 User Manual** for full specifications

Outputs	Total PAR, Diffuse PAR.
Maximum range	2500 $\mu\text{mol} \cdot \text{m}^{-2} \cdot \text{s}^{-1}$
Extension cables	5 m, 10 m, 25 m
Mounting	1/4 inch Whitworth tripod socket
Environmental	IP65 shower and dustproof, -20° to +50°C with Alkaline batteries -20° to +70°C with Lithium batteries
Size/weight	120 x 122 x 95 mm, 556g
Power ³	2 x AA Alkaline cells (lifetime up to 1 year)

PDA

Refer to PDA user guide for full specifications

OS	Android 12 (GMS) Android Enterprise Recommended
CPU	MediaTek i350, 4 cores 2.0 GHz
Memory	4 GB (RAM) / 64 GB (Storage)
Display	4.8" capacitive multi-touch 720×1280 pixels Sunlight readable Glove/rain mode
Battery life	17h51m (all RF on)
Battery charging	2h21m
Battery capacity	3.6V 6600mAh 23.76Wh Field replaceable
I/O ports	Fast charging Type-C, OTG USB A host RS232/RS422/RS485 Top connector for expandability Docking connector 1x micro SDXC 1x nano SIM
Environmental	IP67, IEC 60529

Radio Link Performance

Range	Up to 250m line of sight*. Less within a canopy. *Disclaimer: In practical use, we do not guarantee any minimum range. The radio link is an option. Cable can be used as alternative.
Frequency	434 MHz. License exempt in EU and some other countries world-wide.
Operating Temperature	0-60°C

BF5 Transmitter module BF5-RL4

These specifications are in addition to those given above for the standard SunScan type SS1.

Type	BF5-RL4
Antenna	1/4 wave whip, BNC connector
Internal battery	4 x 1.5V AA Alkaline (probe) batteries
Battery lifetime	About 500 hours to 5000 mV endpoint

Environmental sealing	IP 65 (shower and dust proof)
Desiccant pack	Activated clay, 60 x 130 mm
RS232 connector	M12 – 5 way connector
Mounting bush	1/4 inch Whitworth camera tripod socket
Size and weight	125mm x 125mm x 40mm; 450g (excl. antenna)

SunScan with Radio Module SS1-RL4

Type	SS1-RL4
Transmitted power	10 mW maximum
Antenna	1/4 wave whip, BNC connector
Internal battery	4 x 1.5V AA Alkaline (probe) batteries
Battery lifetime	500 -1000 hours operating time
Environmental sealing	IP 65 (shower and dust proof)
Desiccant pack	Activated clay, 60 x 130 mm

Tripod Mounting Plate for BF5 and BF-RL4

Dimensions	170mm x 40mm x 5mm Anodised aluminium
Central tripod hole	1/4 inch Whitworth camera tripod socket
BF5 and BF-RL4 mounts	2 x 1/4 inch Whitworth camera screws

SunScan to BF5 Cable

A 10 metre long (EXT/8w-5) cable is provided as standard for connecting a BF5 Sunshine Sensor to a SunScan Probe (unless using the radio link).

Types	EXT/8w-5
Length	10 m
Terminations	5 way M12 male to 5-way M12 female

SunScan to BF5 Extension Cables

EXT/8w-xx cables can be used to extend the length of the BF5 to SunScan cable.

Types	EXT/8w-5, EXT/8w-10, EXT/8w-25
Length	5 m, 10 m, 25 m
Terminations	5-way M12 male to 5-way M12 female

Telescopic Tripod

3-way head with quick release platform. Geared friction elevator control. Locking leg catches and brace. Dual Spike/rubber feet.

Type	BFT1
Max height	1.73 m
Closed length	0.68 m
Weight	2.5 kg
Screw mount	1/4inch Whitworth socket

Carrying Case

Moulded plastic case with O-ring seal for moisture and dust proofing, including pressure release valve. Will take a SunScan Probe, PDA, BF5, BF-RL4 radio link, EXT/8w-5w cable and tripod.

Type	SCC1
Outside dimensions	16 x 41 x 144 cm
Weight	10.4 kg

SunScan Probe Spares Kit type SPS1

A detailed list of parts can be supplied on request. The kit includes:

- electrical components which might be subject to breakdown by electrostatic discharge
- mechanical parts likely to break, be damaged or lost through wear and tear.

BF5 Spares Kit type BF5-SP

A detailed list of parts can be supplied on request.


See also the ***BF5 Sunshine Sensor User Manual***

PAR Performance

The graphs below show the actual spectral and cosine response curves for the SunScan system.

Spectral response


The spectral response curve shows that the SunScan response is almost entirely within the PAR wavelength band of 400 nm - 700 nm. The GaAsP sensors used have an increased sensitivity towards the red end of the spectrum, but this is compensated for by the sharp cut-off at 670 nm. In practice, we have found that these sensors read to within a few percent of an accurate PAR sensor in natural daylight conditions above or within the canopy. However, if you are working under artificial or strongly coloured light you should check the SunScan readings against an accurate PAR sensor if you need to know absolute PAR levels.

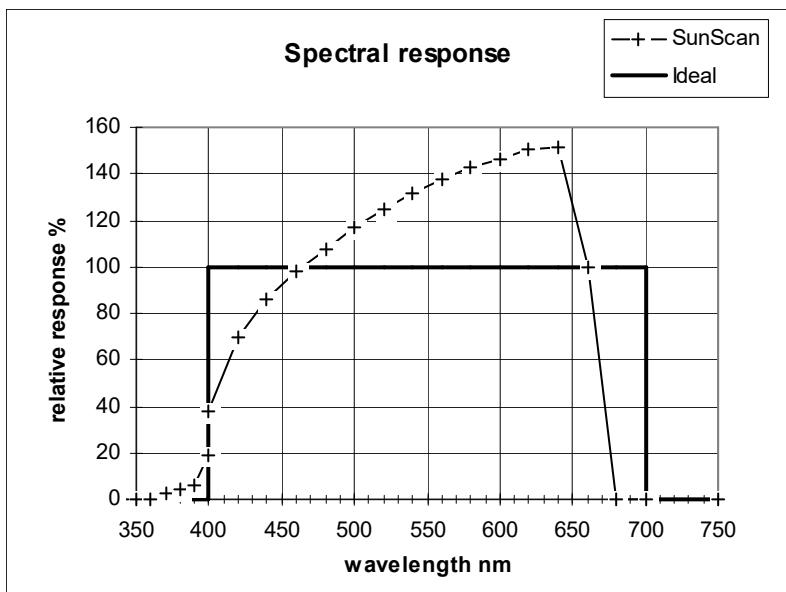

Cosine responses of probe and BF5

The cosine response curves show a diminishing response compared to the ideal at high zenith angles. For this reason, you should avoid taking measurements when the sun is strong and near the horizon.

Most studies will be looking at the ratio of incident and transmitted light, and the graph shows the SunScan and Beam Fraction sensor are very closely matched in their cosine and spectral responses, so the small deviations from the ideal will not introduce significant errors.

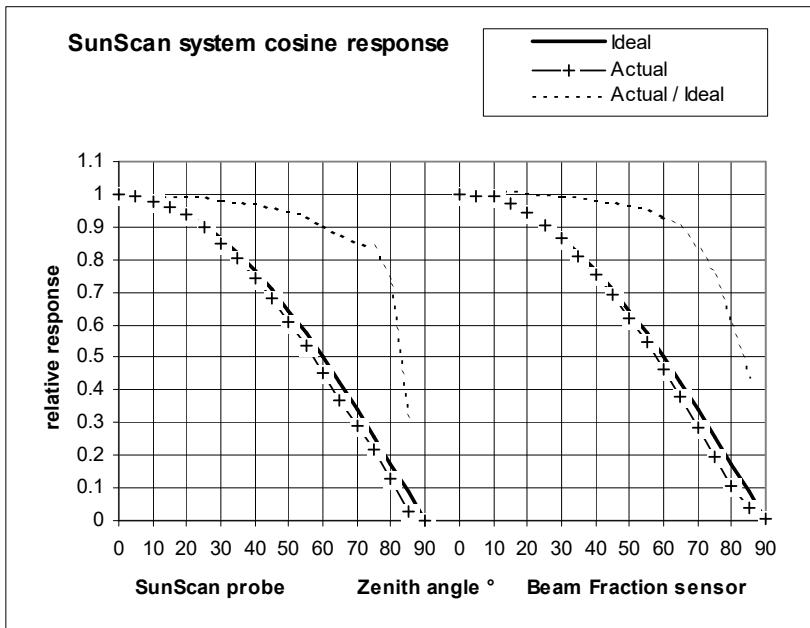

Appendices

A. Logging the probe as a Linear Quantum Sensor

This application of the SunScan probe turns it into a simple Line Quantum sensor that can be attached to a data logger. No Data Collection Terminal is used, but you do require a data logger that can supply power to the probe when taking readings. The Delta-T GP1 and GP2 loggers are suitable for this purpose.

The probe's coiled RS232 cable is not used, and it must be protected from moisture by enclosing it in a bag with desiccant, for example.

Note: no batteries are required in the probe for this mode, but it does not hurt to leave them in situ.

Wiring connections

A special cable is also needed for this application, but because we seldom if ever get asked for one, we do not supply a cable as such. You can make one up by cutting the female connector off an EXT/8w-xx cable, stripping back the insulation to create flying leads as outlined below.

Core		Function	Logger Connection
Pink		V+ Power supply positive	Sensor power positive (switched for warm-up)
green		0V Power supply negative Signal output negative	Sensor power negative (0V) internally linked to Signal LO
yellow		HI Signal output positive	Input channel +
grey		LO Signal output negative	Input channel -
blue		not used	
braid		Screen	Not connected (see below)

Note: the grey, green and braid are connected internally in the probe handle. Connecting the braid to an earthing point on the logger could create earth loops, and is not recommended.

Output

- The output signal is the transmitted PAR irradiance, averaged along the length of the probe. (Individual photodiode readings are not accessible in the Linear Quantum Sensor mode.)
- The millivolt output is linear, with a sensitivity of $1 \text{ mV} = 1 \mu\text{mol} \cdot \text{m}^{-2} \cdot \text{s}^{-1}$. Maximum output is 2.5 V.

Logger requirements

- The probe requires a voltage supply of 7-15 V dc (unregulated), at about 30 mA current. The analogue output is enabled when the external voltage is greater than the battery voltage.
- Configure one channel of the logger for voltage input, with the above sensitivity.
- Use a "warm-up" time of 1 second (the logger must apply the power 1 second before taking its reading).
- The output voltage will be stable 120 ms after applying external power, and is updated every 60 ms while external power remains connected.

B. Logging the Beam Fraction sensor

You can log the Beam Fraction sensor in a similar manner, using the (optional) special logging cable for it. Three outputs are available, corresponding to the Total incident PAR, Diffuse PAR and Sun state.

Be aware that separately logged incident PAR readings cannot be merged with probe readings of transmitted PAR to give LAI estimates using the SunScan mathematical model.

See also the **BF5 Sunshine Sensor User Manual**.

Note we can provide no data logger software to combine and process these readings to estimate Leaf Area Index

Glossary

Beam fraction - the fraction of the Total incident PAR in the Direct beam.

Beam Fraction Sensor - The BF5 consists of an array of 7 photodiodes under a specially shaped shadow mask, used for measuring Direct and Diffuse light above the canopy.

Beer's law - a general law describing transmission through an absorbing medium. The intensity falls off exponentially with distance through the medium.

Cosine response - the response of a sensor to a ray of light is proportional to the cosine of the angle of incidence of the ray (measured from the perpendicular to the sensor surface).

CSV (Comma Separated Variable) a file format intended for importing into spreadsheet or database programs. Fields are separated by commas, text is enclosed in quotes. (SunScan use of this file format was discontinued in 2008, when we upgraded SunData to work on Windows Mobile PDAs. We have replaced this file format with TAB format files, which behaves better across international regions when imported into spreadsheets).

PDA/Data Collection Terminal - Handheld computer to run SunData software and take readings

Diffuse light - light scattered in the atmosphere. It is treated as coming from all parts of the sky with equal intensity i.e. a Uniform Overcast Sky.

Direct beam - light coming directly from the sun, with no scattering. Usually treated as if it comes from a point source.

ELADP - see Leaf Angle Distribution

Emulator - a setting in the SunData software that generates random results, regardless of whether a SunScan probe is connected. Useful for learning to use the software.

GMT - Greenwich Mean Time, also called Universal Time (UT). The standard time used for astronomical measurements and calculations.

Hemispherical response - the response of the sensor is equal for all light rays coming from above the plane of the sensor surface, independent of angle.

LAD - see Leaf Angle Distribution.

LAI - see Leaf Area Index.

Leaf absorption - the fraction of intercepted PAR that is absorbed by the leaf. The remainder is reflected or scattered.

Leaf Angle Distribution - a way of describing the distribution of orientations in space of the canopy elements. We model this using the Ellipsoidal Leaf Angle Distribution, which describes the distribution of canopy elements as in the same proportions as the surface of an ellipsoid. Using this model, a wide range of different canopy types can be described

by a single parameter, the Ellipsoidal Leaf Angle Distribution Parameter (ELADP), which is the ratio of the horizontal to vertical axes of the ellipsoid. An ELADP much greater than 1 describes a canopy of mostly horizontal leaves, an ELADP near 0 describes a canopy of mainly vertical leaves.

Leaf Area Index (LAI) - the surface area of leaf per unit of ground area (assuming leaves are flat, and including only one side of each leaf). Instruments like the SunScan cannot differentiate between leaf and stem, so could more correctly be said to estimate Plant Area Index.

Local time - the time used in your particular time zone. It varies from GMT by an amount depending on longitude, political boundaries, and any daylight saving time.

Mean Leaf Angle (also Mean Tip Angle, Mean Inclination Angle) is the average angle of all the leaf elements relative to the horizontal, weighted according to area. This can be directly related to ELADP.

PAR - Photosynthetically Active Radiation is visible light of wavelength 400 nm - 700 nm. It is measured in units of $\mu\text{mol.m}^{-2}\text{s}^{-1}$ (micromoles per square metre per second) or formerly μE (micro-Einstein). The normal daylight maximum is a little over 2000 $\mu\text{mol.m}^{-2}\text{s}^{-1}$.

PAR mapping - the study of distribution and variation of PAR within and below a canopy.

PRN a text file format intended for directly printable output.

Spread - a measure of the relative variation in light intensity along the SunScan probe. It is calculated as the Standard Deviation divided by the Mean (sometimes called coefficient of variation).

SunData software- the software used to drive the SunScan probe and calculate and store the results.

SunScan probe - the long light sensitive wand and handle used for light readings within the canopy.

TAB - a text file format in which data fields are separated by TAB characters. This file format is easily imported into spreadsheets such as Excel, and can incorporate different conventions for number and date formats.

Total PAR - the sum of Direct beam PAR and the Diffuse light PAR.

Transmission fraction - the fraction of incident light that passes through a given canopy. It can refer to Direct, Diffuse, or Total incident light.

Zenith angle - the angle between the centre of the sun and the point directly overhead.

Technical Support

Terms and Conditions of sale

Our Conditions of Sale (see Delta-T website for full terms and conditions) set out Delta-T's legal obligations on these matters. The following paragraphs summarise Delta-T's position, but reference should always be made to the exact terms of our Conditions of Sale which will prevail over the following explanation.

Delta-T warrants that the goods will be free from defects arising out of the materials used or poor workmanship for a period of twenty four months from the date of delivery.

Delta-T shall be under no liability in respect of any defect arising from fair wear and tear, and the warranty does not cover damage through misuse or inexpert servicing, or other circumstances beyond their control.

If the buyer experiences problems with the goods they shall notify Delta-T (or Delta-T's local distributor) as soon as they become aware of such problem.

Delta-T may rectify the problem by replacing faulty parts free of charge, or by repairing the goods free of charge at Delta-T's premises in the UK during the warranty period.

If Delta-T requires that goods under warranty be returned to them from overseas for repair, Delta-T shall not be liable for the cost of carriage or for customs clearance in respect of such goods. However, Delta-T requires that such returns are discussed with them in advance and may at their discretion waive these charges.

Delta-T shall not be liable to supply products free of charge or repair any goods where the products or goods in question have been discontinued or have become obsolete, although Delta-T will endeavour to remedy the buyer's problem.

Delta-T shall not be liable to the buyer for any consequential loss, damage or compensation whatsoever (whether caused by the negligence of the Delta-T, their employees or distributors or otherwise) which arise from the supply of the goods and/or services, or their use or resale by the buyer.

Delta-T shall not be liable to the buyer by reason of any delay or failure to perform their obligations in relation to the goods and/or services if the delay or failure was due to any cause beyond the Delta-T's reasonable control.

Service and Spares

Users in countries that have a Delta-T distributor or technical representative should contact them in the first instance.

Spare parts for our own instruments can be supplied and can normally be despatched within a few working days of receiving an order.

Spare parts and accessories for products not manufactured by Delta-T may have to be obtained from our supplier, and a certain amount of additional delay is inevitable.

No goods or equipment should be returned to Delta-T without first obtaining the return authorisation from Delta-T or our distributor.

On receipt of the goods at Delta-T you will be given a reference number. Always refer to this reference number in any subsequent correspondence. The goods will be inspected and you will be informed of the likely cost and delay.

We normally expect to complete repairs within one or two weeks of receiving the equipment. However, if the equipment has to be forwarded to our original supplier for specialist repairs or recalibration, additional delays of a few weeks may be expected. For contact details see below.

Technical Support

Users in countries that have a Delta-T distributor or technical representative should contact them in the first instance.

Technical Support is available on Delta-T products and systems. Your initial enquiry will be acknowledged immediately with a reference number. Make sure to quote the reference number subsequently so that we can easily trace any earlier correspondence.

In your enquiry, always quote instrument serial numbers, software version numbers, and the approximate date and source of purchase where these are relevant.

Contact Details

Delta-T Devices Ltd
130 Low Road, Burwell,
Cambridge CB25 0EJ, U.K.

Tel: +44 (0) 1638 742922
Fax: +44 (0) 1638 743155
email: tech.support@delta-t.co.uk
email: sales@delta-t.co.uk
web: www.delta-t.co.uk

Index

Absorption	35	
Accuracy	43, 44, 73	
All data.....	22	
Antenna.....	14, 15, 65, 66, 75	
Batteries	11, 12, 60, 62, 64, 65, 66	
Beam fraction	81	
Beam Fraction sensor.....	9	
Beam Fraction Sensor	31, 81	
Beam Fraction Sensor Handling	43	
Beer's law	81	
Beer's law	49	
belt	42	
Belt.....	10	
Belts	42	
BF3	61; Specifications	73
BF3 and BFS Terminology	9	
BF3 dome.....	14, 64	
BF3 Spares.....	76	
BF-RL4.....	61, 74	
bubble level.....	41	
Button Actions	17	
cables	43	
Cables	10	
calibrations.....	44	
Campbell's Ellipsoidal LAD	49	
canopy.....	31	
Canopy	7, 15, 16, 67	
canopy model.....	53	
canopy transmission	52	
Canopy type	33	
Canopy type and LAI.....	34	
Carrying Case	10, 76	
CE Conformity.....	2	
Conditions of sale	83	
Configuration.....	24	
Contact Details.....	84	
Copyright	2	
Cosine response	81	
CSV	81	
Data Collection Terminal	81	
data file	24	
data files	27; display	27
Data Files	26	
Data.txt.....	26	
D-connector.....	14, 65	
Default.cfg	25	
Description.....	9	
desiccant.....	62	
Desiccant.....	11, 12, 62	
Diffuse light - hemispherical response	55	
Diffuse light	81	
Diffuse light - cosine response	55	
Diffuse light transmission	52, 56	
Direct and Diffuse	33	
Direct beam	81	
Disclaimer	7	
Display mode	24	
ELADP.....	35, 81	
Emulator.....	21, 81	
Environmental.....	46	
errors	41	
Experiment Design.....	31	
EXT/8w-xx: cable	7	
factory calibration	45	
firmware version	30	
Foliage	7, 67	
Fractional Interception	7	
Frequency	7	
Glossary	81	
GMT	81	
Hemispherical response	81	
Incident light	16, 66, 67	
Install SunData	67	
LAD	81	
LAI.....	16, 19, 31, 32, 66, 81	
LAI Readings	40	
LAI theory	47	
Leaf absorption	81	
Leaf Angle Distribution	81	
Leaf Area Index	6, 82	
Leaf constants	24	
Levelling	41	
Light level	35	

Local time	82
logger cable.....	10
Logger requirements	80
Logging.....	79
Maintenance.....	11, 12, 60
mapping	82
Mean Leaf Angle	82
Mean Leaf Angle and ELADP	38
Measurement modes	39
Measurement procedures	41
Menus	28
Modelling.....	57
moisture	46
Mounting plate.....	14
Nomad PDA: Specifications	74
On/off button.....	12, 14, 65
Out of range	15
OverView.....	6
PAR	82; Cosine response78; spectral response77
PAR absorption and scattering.....	57
PAR calibration.....	63
PAR calibrations	44
PAR Mapping	7
PAR measurements.....	6
PAR Readings.....	40
Parts and Accessories.....	8
PC Operations.....	23
PDA	9, 65, 66
PDA batteries.....	61
PDA Belt and Holsters.....	42
PRN	82
Probe handle	11, 65
Probe LED	66
protection	46
Protective Case	42
Quick Start.....	17
Radiation: PAR.....	15, 16, 64, 65, 66; Total and Diffuse.....64, 66, 67
Radio Link	11, 74
Range	7, 15, 66
Read	17
Recalibrate	44
Receiver	11, 15, 66
references.....	59
regional settings	27
Relocating the BF3.....	7
Review Data.....	22
RS232 cable	64, 65
Sampling volume	34
Service	84
settings	24
Settings.....	18
Signal	15, 66, 67
Site	24
Spares	84
Spares Kit.....	76
Specifications	73
Spread	45, 82
SS1-RL4.....	61, 75
Store	17
Straps	42
SunData	82
SunData software	9, 15
SunScan probe	82; specs73
SunScan Probe	11, 14, 65
Sunshine Sensor	7
System Connection Options	13
TAB separated .TXT	27
Technical Support	83
Terms	83
time	24
Time of day	35
Total PAR	82
Transmission fraction	82
Transmitter module ..	7, 11, 12, 14, 15, 62, 66
Trees	15
tripod.....	43
Tripod: Specifications	76
Troubleshooting	15, 64
uncertainties	48
Version and serial number location.....	72
version number.....	30
Warning	16; PDA buttons17
Warnings	2
weather conditions	35
zenith angle	35
Zenith angle	82
zenith angles.....	58